




# noraONE

## A safe and reliable installation system

In the field of full spread wet adhesives for resilient floor covering, nora one® offers the best possible solution. Environmentally friendly and certified low-emitting nora® flooring products together with specially formulated installation components combined with nora® Approved Installers form a complete manufacturers' warranted system. nora one system components are only eligible for jobs that meet the minimum requirements of 50,000 square feet.

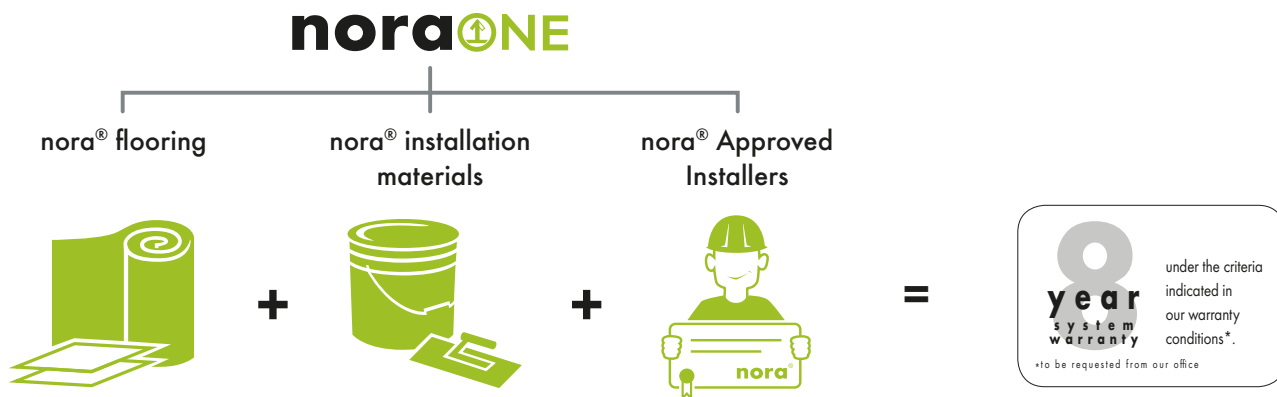

## The advantages

- The use of quality installation products, especially developed for nora flooring
- Optimum installation results thanks to key technical properties tested as a system (not as individual products) – outstanding dimensional stability, residual indentation, and peel strength
- Support from nora® Technical Department in all phases
- Customized job specific solution and installation instructions


Be a part of nora one. Contact us at **tech@nora.com** to become a nora® Approved Installer, or for recertification.

**nora**®  
by Interface®

# Product overview – nora one<sup>®</sup>

All nora one system components are perfectly matched to each other and certified for very low emission.

Find more information and Product Data Sheets at [www.nora.com/us/noraone](http://www.nora.com/us/noraone)

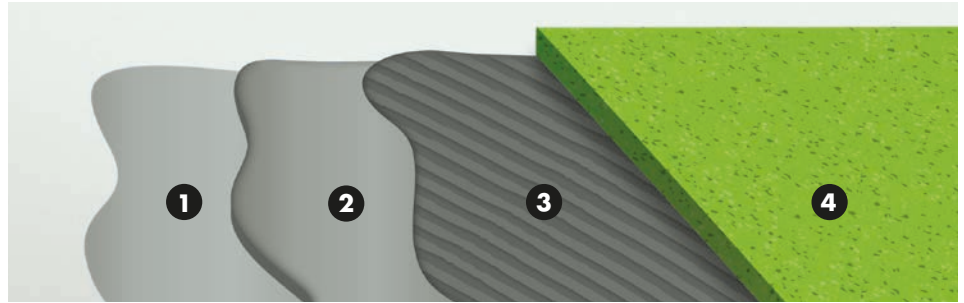

## 1 Primers

### nora<sup>®</sup> PRP 101

Special primer for absorptive substrates

- very fast-drying
- ready to use
- excellent penetration capability

### nora<sup>®</sup> PRN 102

Special primer for non-absorptive substrates

- very fast-drying
- ready to use
- film-forming

### nora<sup>®</sup> DPM 100

2-part epoxy damp proof membrane

- barrier effect of moisture up to 100% RH
- reduced odor during application
- fast curing

## 2 Leveling compounds

### nora<sup>®</sup> L 1000

High performance self-leveling compound

- excellent absorption
- pumpable
- low-stress

### nora<sup>®</sup> SP 111

Moisture resistant skimcoating and patching compound

- fast-drying
- usable without a primer
- feather edge

## 3 Adhesives

### nora<sup>®</sup> AC 100

Acrylic adhesive

- high shear strength
- high dimensional stability
- odorless during and after application

### nora<sup>®</sup> ED 120

Fiber-reinforced conductive acrylic adhesive

- high shear strength
- high dimensional stability
- odorless during and after application

### nora<sup>®</sup> PU 102

2-part polyurethane adhesive

- for heavy-duty surfaces
- high dimensional stability
- odorless during and after application

## 4 Floor covering



nora<sup>®</sup> premium rubber flooring with its exceptionally long-lasting functionality offers a solution to meet highest requirements in diverse market segments and application areas. Our norament<sup>®</sup> and noraplan<sup>®</sup> floor coverings are slip resistant and flame retardant, exhibit outstanding ergonomic properties, and absorb footfall sounds.

The complete absence of plasticizers (phthalates) allows nora rubber to be installed tightly and edge to edge without welding and remain dimensionally stable for decades.

### nora systems, Inc.

9 Northeastern Blvd.  
Salem, NH 03079  
Toll free: 800-332-NORA  
Phone: (603) 894-1021  
Fax: (603) 894-6615  
E-mail: [info-us@nora.com](mailto:info-us@nora.com)  
[www.nora.com/us](http://www.nora.com/us)

**nora**<sup>®</sup>  
by Interface<sup>®</sup>