


noraplan linee™

SHEET

Rubber floor covering with a linear pattern and surface profile that bring subtle dimension to the floor while both accentuating and supporting the muted colorway.

- Good for heavy traffic
- Superior footfall sound absorption
- Excellent slip resistance
- Increased safety thanks to high fire-retardant properties
- Seamless installation
- No coatings needed

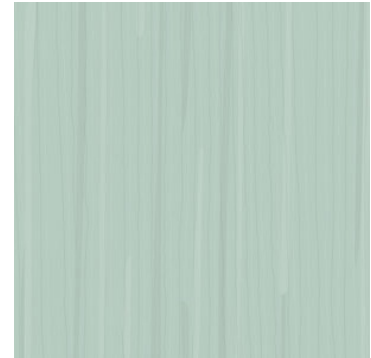

Product Data

Product	noraplan linee™ 3.0 mm sheet resilient floor covering, Article 161E
Description	nora® vulcanized rubber compound 913 with environmentally compatible color pigments that are free of toxic heavy metals like lead, cadmium, or mercury.
Characteristics	Material Dimensions: 39.37 feet x 48 inches (12 m x 1.22 m) Thickness: 0.12 inches (3.0 mm) Dimensional Stability: Meets requirements Composition: Homogeneous rubber compound Colors: 10 Standard Surface: Striated profile

Technical Data

Static Load Limit	ASTM F970, Residual compression of 0.003" with 800 lbs. ≤ 0.005" with 250 lbs. is required
Rolling Load Limit	ASTM F2753, ≤ 550 lbs. /sq. inch; no forklift traffic
Slip Resistance	ASTM D2047 Static coefficient of friction, Neolite dry 0.85 Neolite wet 0.75 ≥ 0.5 is required (not recommended for ramps),
Flammability	ASTM E648; NFPA 253; NBSIR 75 950, 1.03 Class 1, ≥ 0.45 watts/sq. cm is required
Smoke Density	ASTM E662; NFPA 258; NBS, 360 (flaming) and 203 (non-flaming) < 450 is required
Bacteria Resistance	ASTM E2180 and ASTM G21, resistant to bacteria, fungi, and micro-organism activity
Sound Absorption	ISO 140, Δ Lw10dB (compare only Δ values)
Hardness	ASTM D2240, Shore type "A", 92 achieved, ≥ 85 is required
CAN/ULC-S102.2	Surface Burning, FSC1 of 125 and SD of 370

Health & Environmental

Carbon Neutral Floors	All flooring products 3rd party verified carbon neutral throughout their entire life cycle through the Interface Carbon Neutral Floors™ program. Learn more at www.interface.com/carbonneutral .
Indoor Air Quality	Greenguard Gold Certified for low VOC Emissions in compliance with CDPH 01350
Material Composition	Free of Added Formaldehyde, Heavy Metals and Ortho Phthalates, Fluorinated Chemicals (PFAS), and Halogenated Flame Retardants.
Transparency	Cradle to Cradle v3.1 Silver, Environmental Product Declarations (EPDs), and Health Product Declarations (HPDs) available for all standard norament and noraplan floor coverings. Learn more at www.nora.com/us .
Production Plant Certifications	ISO 9001:2000 ISO 14001

Installation

Site Conditions	The installation area must be fully enclosed, weather tight, and climate controlled between 63°F and 75°F and 40% to 60% ambient relative humidity (RH) for at least 48 hours prior, during and 72 hours after installation.
Adhesive	Absorptive substrates: use nora® AC 100 or nora dryfix™ 750 adhesives Non-absorptive substrates: use nora dryfix 750 adhesive
Unique Characteristics	Welding not required

For complete installation instructions, refer to the nora® Installation Instructions.

Care and Cleaning

Refer to the noraplan® Maintenance Guidelines.

Wheel Types

No metal or hard plastic wheels, the shape of the contact surface of wheels must be flat with round edges. The shore hardness must be ≤ 90 type A.

Storage

nora® flooring can be stored within a temperature range of -5°F (-21°C) to 120°F (49°C) under the following conditions: Pallets shall remain intact, undamaged, not be stacked, be in a permanently dry environment, and with no direct sunlight. However, all adhesives and cold weld must remain at room temperature without freezing.

Warranty

Limited 5-year warranty. See nora® Limited Warranty.

For current nora® Installation Instructions, Guide Specifications, Maintenance Guidelines, and Limited Warranties, please visit www.nora.com/us.

Updated: March 2021

nora systems, Inc.

9 Northeastern Blvd.
Salem, NH 03079
Toll free: 800-332-NORA
Phone: (603) 894-1021
Fax: (603) 894-6615
E-mail: info-us@nora.com
www.nora.com/us