


# nora<sup>®</sup> sanitary base

## BASE

nora<sup>®</sup> sanitary base is easy to clean and suitable for areas with stringent hygienic requirements.

- Good for very heavy traffic
- Increased safety thanks to high fire-retardant properties
- No coatings needed

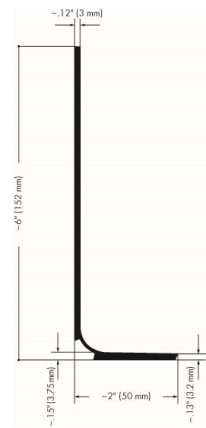

### Product Data

Product	nora <sup>®</sup> sanitary base, Article 817 - S 3019 D
Description	nora <sup>®</sup> vulcanized rubber compound 959 with natural fillers and environmentally compatible color pigments that are free of toxic heavy metals like lead, cadmium or mercury.
Characteristics	<p>Material Dimensions:</p> <p>Length: 32.81 feet (10 m)</p> <p>Depth: 1.97 inches (50 mm)</p> <p>Height: 5.98 inches (152 mm)</p> <p>Thickness: 0.13 inches (3.2 mm)</p> <p>Dimensional Stability: Meets requirements</p> <p>Composition: Homogeneous rubber compound</p> <p>Colors: 25 standard colors</p> <p>Surface: smooth</p>

### Technical Data

ASTM F1861	Type TP, rubber, thermoplastic
Flammability	ASTM E648; NFPA 253; NBSIR 75 950, 1.0 Class 1, $\geq 0.45$ watts/sq. cm is required
Smoke Density	ASTM E662; NFPA 256; NBS, 147 (flaming) and 249 (non-flaming) < 450 is required
Bacteria Resistance	ASTM E2180 and ASTM G21, resistant to bacteria, fungi, and micro-organism activity
CAN/ULC-S102.2	Surface Burning, FSC1 of 70 and SD of 470

## Environmental Attributes

VOC Emissions	Greenguard Gold certified for low VOC Emissions in compliance with California Department of Public Health (CDPH) Standard Method v1.1-2010
LEED Contribution	Meets VOC emissions requirements of LEED

## Installation

Site Conditions	The installation area must be fully enclosed, weather tight, and climate controlled between 63°F and 75°F and 40% to 60% ambient relative humidity (RH) for at least 48 hours prior, during and 72 hours after installation.
Adhesive	Use nora <sup>®</sup> profix adhesive for all substrates
Unique Characteristics	Replaces the need for flash coving flooring Solid design with less seams All vertical seams must be cold welded If welding is required nora <sup>®</sup> cold weld must be used

For complete installation instructions, refer to the nora<sup>®</sup> Installation Guide.

## Care and Cleaning

Refer to the nora<sup>®</sup> Maintenance Guides.

## Wheel Types

No metal or hard plastic wheels, the shape of the contact surface of wheels must be flat with round edges. The shore hardness must be type A ≤ 90.

## Storage

nora<sup>®</sup> flooring can be stored within a temperature range of -5°F (-21°C) to 120°F (49°C) under the following conditions: Pallets shall remain intact, undamaged, not be stacked, be in a permanently dry environment, and with no direct sunlight. However, all adhesives and cold weld must remain at room temperature without freezing.

## Warranty

Limited 5 year warranty. See nora<sup>®</sup> Limited Warranty.

For current nora<sup>®</sup> Installation Guides, Guide Specifications, Maintenance Guides, and Limited Warranties, please visit [www.nora.com/us](http://www.nora.com/us).

*Updated: November 2018*

### **nora systems, Inc.**

9 Northeastern Blvd.  
Salem, NH 03079  
Toll free: 800-332-NORA  
Phone: (603) 894-1021  
Fax: (603) 894-6615  
E-mail: [info-us@nora.com](mailto:info-us@nora.com)  
[www.nora.com/us](http://www.nora.com/us)