


nora[®] wall base

BASE

nora[®] wall base delivers a consistent height and toe dimension you can depend on and exudes a professional appearance that adds that final touch to your installation.

- Superb flexibility, scratch, and scuff resistance
- No color drifts and no dye lots
- UV resistance, color will not fade
- Ribbed back design for more secure adhesion
- Micro squared angled up-cut to minimize joint visibility
- Stable dimensions - height, toe, gauge, etc.
- Reinforced cove for greater durability in the toughest applications

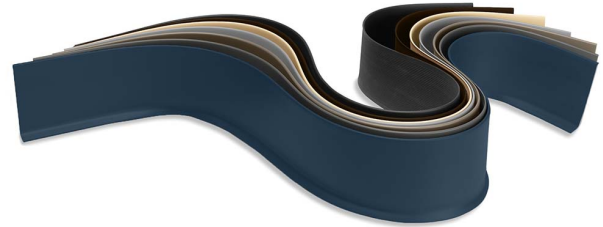

Product Data

Product	nora [®] wall base, Article 820
Description	nora [®] vulcanized rubber compound 999 with natural fillers and environmentally compatible color pigments that are free of toxic heavy metals like lead, cadmium, or mercury.
Characteristics	<p>Material Dimensions:</p> <p>Length: 120 feet (36.6 m)</p> <p>Height: 4 inches (102 mm)</p> <p>Thickness: 0.13 inches (3.2 mm)</p> <p>Dimensional Stability: Meets requirements</p> <p>Composition: Heterogeneous rubber compound</p> <p>Colors: 20 standard colors</p> <p>Surface: Smooth</p>

Technical Data

ASTM F1861	Type TP, rubber, thermoplastic
Flammability	ASTM E648; NFPA 253; NBSIR 75 950, 0.99 Class 1, ≥ 0.45 watts/sq. cm is required
Smoke Density	ASTM E662; NFPA 256; NBS, 258 (flaming) and 273 (non-flaming) < 450 is required
Bacteria Resistance	ASTM E2180 and ASTM G21, resistant to bacteria, fungi, and micro-organism activity

Health & Environmental

Carbon Neutral Floors	All flooring products 3 rd party certified carbon neutral throughout their entire life cycle through the Interface Carbon Neutral Floors program
-----------------------	---

Indoor Air Quality	GREENGUARD Gold Certified for Low VOC Emissions in compliance with CDPH 01350
Material Composition	Free of added formaldehyde, lead and heavy metals
LEED Contribution	Meets VOC emissions requirements of LEED

Installation

Site Conditions	The installation area must be fully enclosed, weather tight, and climate controlled between 63°F and 75°F and 40% to 60% ambient relative humidity (RH) for at least 48 hours prior, during and 72 hours after installation.
Adhesive	Use standard wall base adhesive; nora does not manufacture base adhesive
Unique Characteristics	Long runs with minimal seams Outside corners must be heated and formed, do not gouge and bend Alternate sizes, styles and formats and custom colors possible; minimum quantities apply

For complete installation instructions, refer to the nora® Installation Guide.

Care and Cleaning

Refer to the nora® Maintenance Guides.

Storage

nora® flooring can be stored within a temperature range of -5°F (-21°C) to 120°F (49°C) under the following conditions: Pallets shall remain intact, undamaged, not be stacked, be in a permanently dry environment, and with no direct sunlight. However, all adhesives and cold weld must remain at room temperature without freezing.

Warranty

Limited 5-year warranty. See nora® Limited Warranty.

For current nora® Installation Guides, Guide Specifications, Maintenance Guides, and Limited Warranties, please visit www.nora.com/us.

Updated: May 2020

nora systems, Inc.

9 Northeastern Blvd.
Salem, NH 03079
Toll free: 800-332-NORA
Phone: (603) 894-1021
Fax: (603) 894-6615
E-mail: info-us@nora.com
www.nora.com/us

