


noraplan[®] sentica nTx

SHEET

Rubber flooring with a changing base color consisting of three harmoniously matched color components in a smooth surface for heavy traffic areas. With nora[®] nTx pre-applied adhesive backing.

- Good for heavy traffic
- Superior footfall sound absorption
- Excellent slip resistance
- Increased safety thanks to high fire-retardant properties
- Seamless installation
- No coatings needed
- No moisture limit

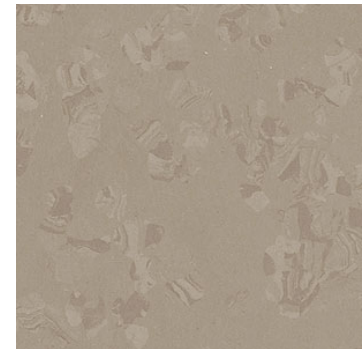

Product Data

Product	noraplan [®] sentica nTx 3.0 mm sheet resilient floor covering, Article 186C
Description	nora [®] vulcanized rubber compound 913 with environmentally compatible color pigments that are free of toxic heavy metals like lead, cadmium or mercury.
Characteristics	Material Dimensions: 39.37 feet x 48 inches (12 m x 1.22 m) Thickness: 0.12 inches (3.0 mm) Dimensional Stability: Meets requirements Composition: Homogeneous rubber compound with a random scattered design Colors: 5 colors; additional colors available with minimum order Surface: Smooth

Technical Data

Static Load Limit	ASTM F970, Residual compression of 0.003" with 800 lbs. ≤ 0.005" with 250 lbs. is required
Rolling Load Limit	≤ 550 lbs. /sq. inch, no forklift traffic
Slip Resistance	ASTM D2047 Static coefficient of friction, Neolite dry 0.93 Neolite wet 0.90 ≥ 0.5 is required (not recommended for ramps)
Flammability	ASTM E648; NFPA 253; NBSIR 75 950, 0.82 Class 1, ≥ 0.45 watts/sq. cm is required
Smoke Density	ASTM E662; NFPA 256; NBS, 282 (flaming) and 155 (non-flaming) < 450 is required
Bacteria Resistance	ASTM E2180 and ASTM G21, resistant to bacteria, fungi, and micro-organism activity
Sound Absorption	ASTM E2179; ISO 140, Δ IIC 14, Lw 10dB (compare only Δ values)
Hardness	ASTM D2240, Shore type "A", 92 achieved, ≥ 85 is required
CAN/ULC-S102.2	Surface Burning, FSC1 of 200 and SD of 1850

Health & Environmental

Carbon Neutral Floors	All floors 3 rd party certified carbon neutral throughout their entire life cycle through the Interface Carbon Neutral Floors program
Indoor Air Quality	Greenguard Gold Certified for low VOC Emissions in compliance with CDPH 01350
Material Composition	Free of Added Formaldehyde, Heavy Metals and Ortho Phthalates, Fluorinated Chemicals (PFAS), and Halogenated Flame Retardants.
Transparency	Cradle to Cradle v3.1 Silver, Environmental Product Declarations (EPDs), and Health Product Declarations (HPDs) available for all standard norament and noraplan floor coverings; for information visit www.nora.com/us
Production Plant Certifications	ISO 9001:2000 ISO 14001

Installation

Site Conditions	The installation area must be fully enclosed, weather tight, and climate controlled between 63°F and 75°F and 40% to 60% ambient relative humidity (RH) for at least 48 hours prior, during and 72 hours after installation.
Adhesive	nora [®] nTx pre-applied adhesive
Unique Characteristics	Welding not required No moisture testing required Immediately open space to traffic with no down time

For complete installation instructions, refer to the nora[®] nTx Installation Guide.

Care and Cleaning

Refer to the noraplan[®] Maintenance Guides.

Wheel Types

No metal or hard plastic wheels, the shape of the contact surface of wheels must be flat with round edges. The shore hardness must be ≤ 90 type A.

Storage

nora[®] flooring can be stored within a temperature range of -5°F (-21°C) to 120°F (49°C) under the following conditions: Pallets shall remain intact, undamaged, not be stacked, be in a permanently dry environment, and with no direct sunlight. However, all adhesives and cold weld must remain at room temperature without freezing.

Warranty

nora[®] nTx Limited 10-year bond warranty and Limited 15-year warranty. See nora[®] nTx and nora[®] Limited Warranties.

For current nora[®] Installation Guides, Guide Specifications, Maintenance Guides, and Limited Warranties, please visit www.nora.com/us.

Updated: April 2020

nora systems, Inc.

9 Northeastern Blvd.
Salem, NH 03079
Toll free: 800-332-NORA
Phone: (603) 894-1021
Fax: (603) 894-6615
E-mail: info-us@nora.com
www.nora.com/us