




noraONE

A safe and reliable installation system

In the field of full spread wet adhesives for resilient floor covering, nora one® offers the best possible solution. Certified low-emitting nora® flooring products, together with specially formulated installation components, when installed by nora® Approved Installers, form a complete manufacturers' warranted flooring system.* nora one system components are only eligible for jobs that meet the minimum requirements of 50,000 square feet.

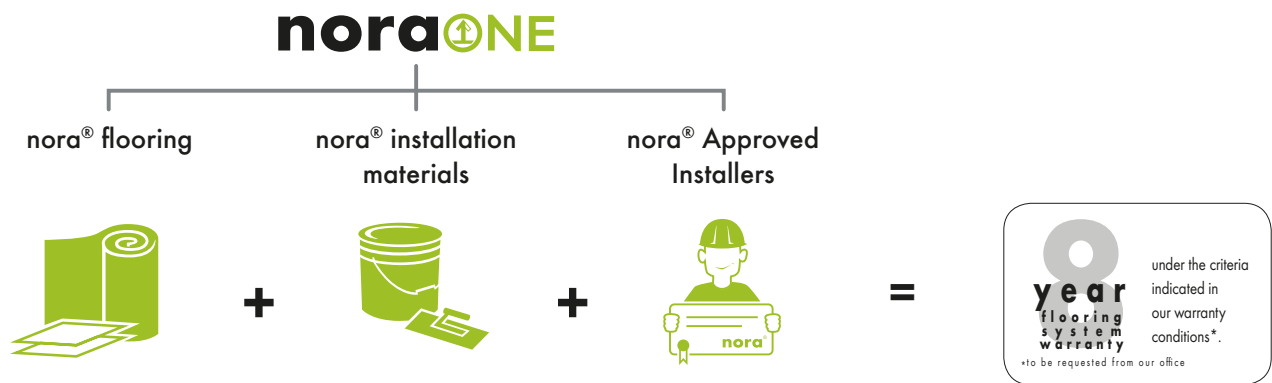

The advantages

- The use of quality installation products, especially developed for nora flooring
- Optimum installation results thanks to key technical properties tested as a system (not as individual products) – outstanding dimensional stability, residual indentation, and peel strength
- Support from nora® Technical Department in all phases
- Customized job specific solution and installation instructions


Be a part of the solution with nora one.
Contact us at **tech@nora.com** to become a nora® Approved Installer, or for recertification.

*References to "flooring system" include norament®/ noraplan® flooring products and corresponding nora installation products. nora provides no warranty as to installation services, which are provided by third parties.

Product overview – nora one®

All nora one system components are perfectly matched to each other and certified for very low emission.

Find more information and Product Data Sheets at www.nora.com/us/noraone

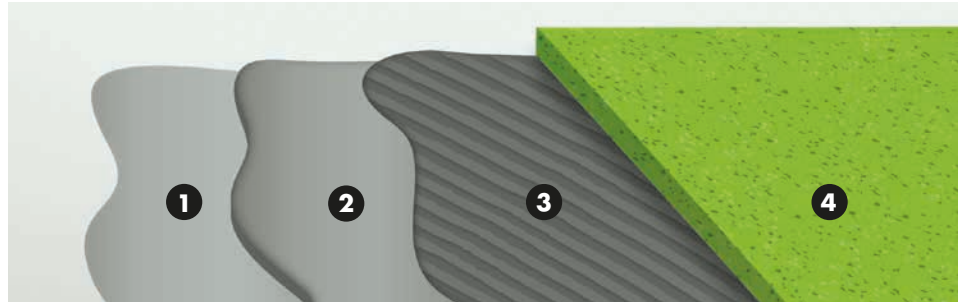

1 Primers

nora® PRP 101

Special primer for absorptive substrates

- very fast-drying
- ready to use
- excellent penetration capability

nora® PRN 102

Special primer for non-absorptive substrates

- very fast-drying
- ready to use
- film-forming

nora® DPM 100

2-part epoxy damp proof membrane

- barrier effect of moisture up to 100% RH
- reduced odor during application
- fast curing

2 Leveling compounds

nora® L 1000

High performance self-leveling compound

- excellent absorption
- pumpable
- low-stress

nora® SP 111

Moisture resistant skimcoating and patching compound

- fast-drying
- usable without a primer
- feather edge

3 Adhesives

nora® AC 100

Acrylic adhesive

- high shear strength
- high dimensional stability
- odorless during and after application

nora® ED 120

Fiber-reinforced conductive acrylic adhesive

- high shear strength
- high dimensional stability
- odorless during and after application

nora® PU 102

2-part polyurethane adhesive

- for heavy-duty surfaces
- high dimensional stability
- odorless during and after application

4 Floor covering



nora® premium rubber flooring with its exceptionally long-lasting functionality offers a solution to meet demanding requirements in diverse market segments and application areas. Our norament® and noraplan® floor coverings are slip resistant and flame retardant, exhibit outstanding ergonomic properties, and absorb footfall sounds.

The complete absence of phthalate plasticizers allows nora rubber to be installed tightly and edge to edge without welding and remain dimensionally stable for decades.

nora systems, Inc.

9 Northeastern Blvd.
Salem, NH 03079
Toll free: 800-332-NORA
Phone: (603) 894-1021
Fax: (603) 894-6615
E-mail: info-us@nora.com
www.nora.com/us

nora®
by Interface®