


nora[®]
by **Interface**[®]

PRODUCT CATALOG



RUBBER FLOOR COVERINGS AND ACCESSORIES 2025

IT'S FLOORING, AND THEN SOME

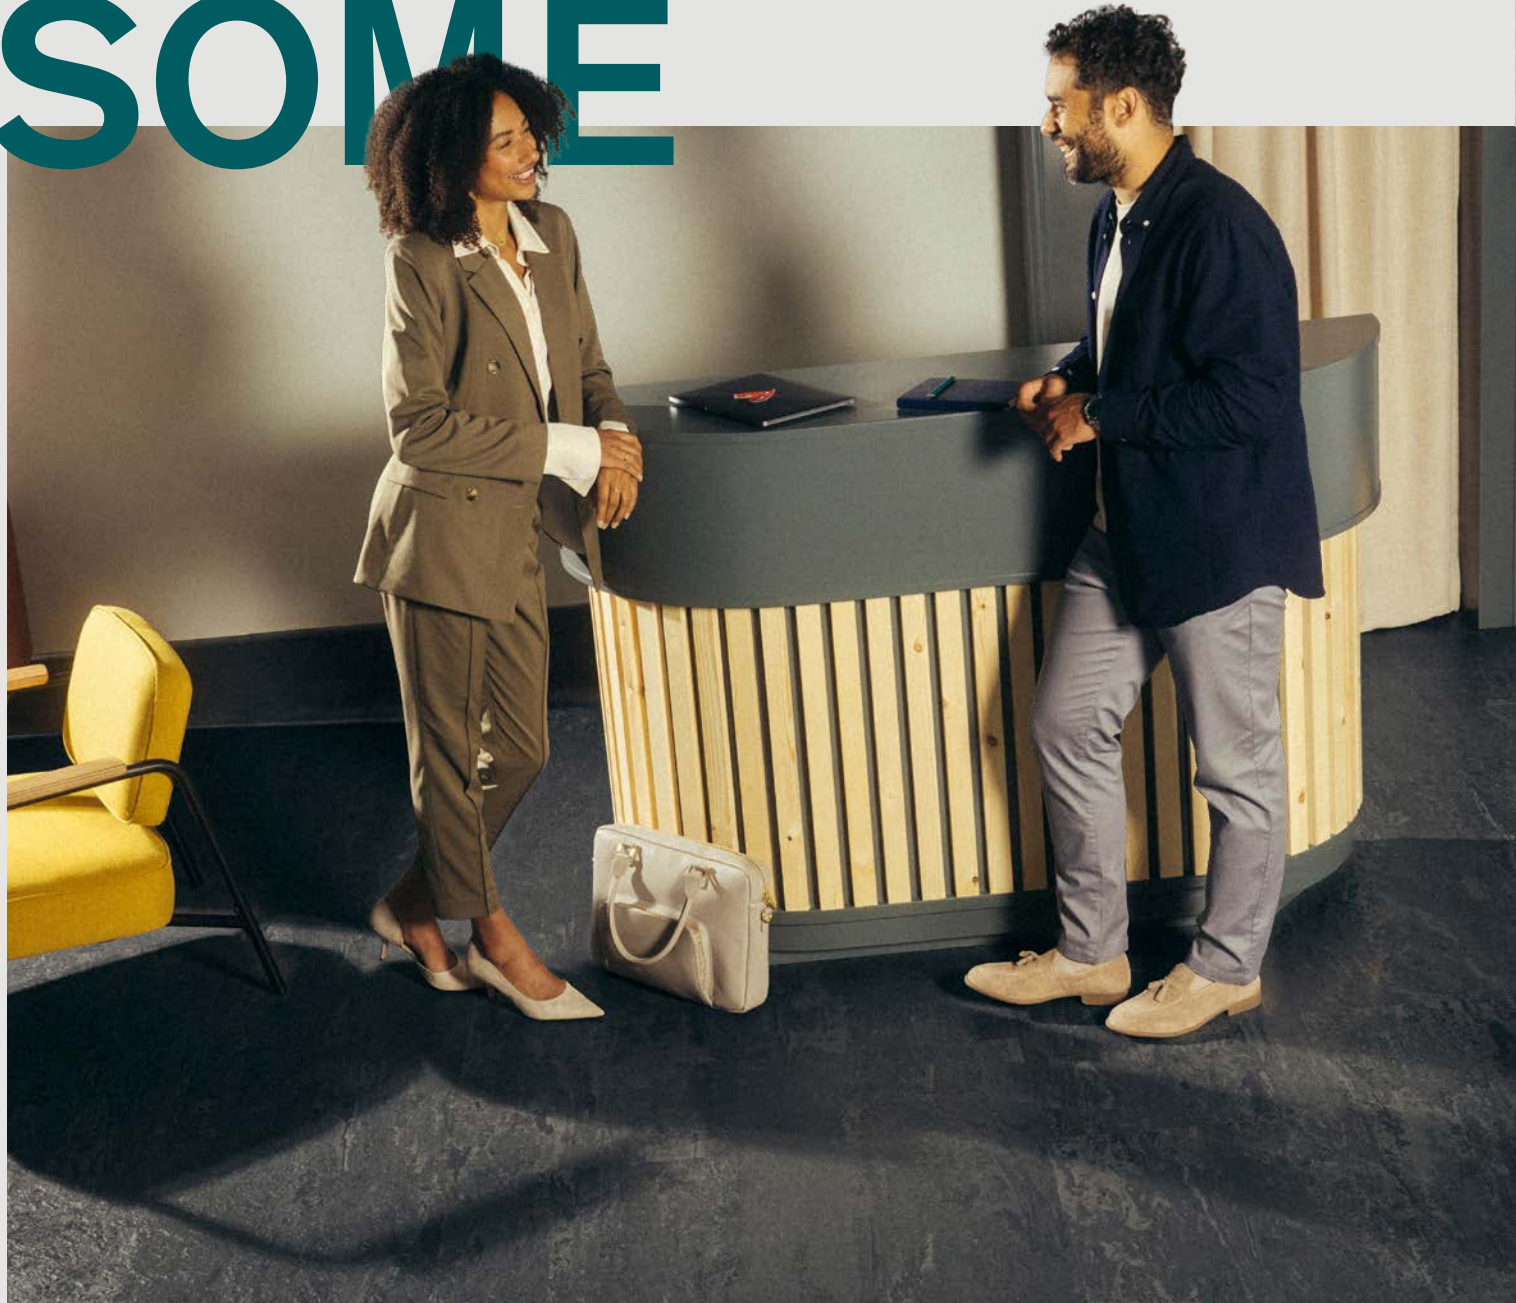

nora® by Interface® is the commercial rubber flooring brand of Interface, Inc. Produced in Germany for more than 70 years and the market leader in the rubber flooring segment, nora develops and produces unique, premium-quality flooring solutions.

Made with purpose and without compromise, Interface flooring brings more sophisticated design, more performance, more innovation, and more climate progress to interior spaces. With nora, Interface complemented its product mix of carpet tile and LVT with rubber flooring, giving customers more choices to meet their flooring needs across endless commercial applications.

Interface and nora will find the perfect solution for any room and any requirements, from classrooms and conference rooms to retail spaces and public areas, from stairways to laboratories and surgical suites.

Introduction ➡	02
Flooring Selector ➡	16
norament® floorings ➡	20
noraplan® floorings ➡	38
nora special floorings ➡	52
Floorings for extreme requirements	54
Electrostatically dissipative floorings (ed)	58
Acoustic floorings	62
nora QuickShip program ➡	64
nora stairwell solutions ➡	72
norament stairtreads	74
nora stair accessories	80
nora installation & care ➡	84
nora nTx	86
nora nTx installation materials	92
nora adhesives	94
nora accessories	98
nora pro clean system	100
nora pro steamer	101
nora 4you ➡	102
Inlays and routing	104
Planks and tiles	106
Custom colors	107
Warranty ➡	108
nora Limited Warranty - Americas	108
nora nTx Warranty	110
nora pro steamer Warranty	111
Technical data ➡	112



WE'RE
MADE
FOR
MORE

Why do we say nora is Made for More? Because we're all about more performance. More design options. More experts on hand to help you: from bid document to aftercare. Even if you don't need us for decades, we'll be here.

Tough where tough matters, gentle underfoot, nora is the flooring you want when design counts every bit as much as the science that goes into it. And when you want a product that doesn't compromise your project – or the planet.

We are nora. Made to last. Made to work. Made for More.

MADE FOR PERFORMANCE



Durable Surface

Withstand extreme stress from heavy rolling loads and wheeled traffic.



Superior Slip Resistance

Help to create safer spaces.



Ergonomic Design

Add comfort underfoot, reducing foot and leg pain.



Reduced Maintenance

Little more than water needed — no finishes, coatings or harsh chemicals necessary.



Quiet Acoustical Performance

Footfall sound absorption to attenuate noise pollution.



Supports Infection Control

Disinfect thoroughly due to a dense, non-porous surface.



Indoor Air Quality

Low-emission and low-pollutant.


If standing up to hard knocks was a sporting event, nora would scoop gold.

Time and time and time again. What guarantees its place on the podium is its durability, reliability and longevity. In hospitals. In laboratories. In factories, schools, airports and subways. For up to 50 years.

Until you experience the incredible strength and support of a surface just millimeters thick, you won't believe how hard-wearing — and long-lasting — nora products really are.



MADE FOR CONFIDENCE

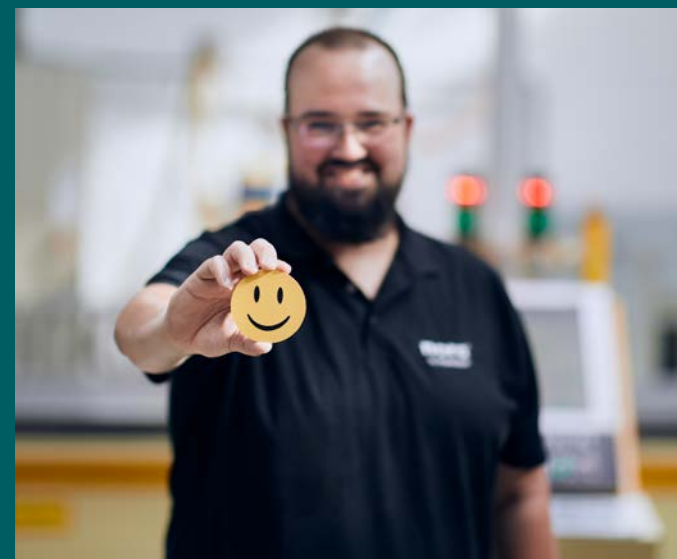


nora lasts. For a really long time. So why do we invest so much in our customer service?

You'll find out when writing a bid. When installers need support. Or decades later, when your team has technical questions.

Because nora comes with something more. Experts. Whole teams of them. Ready to help and advise — before you buy, when you install, and for years to come. It's certainty, and then some.



VITAL BUSINESS CENTER OFFICE BUILDING, HU
© FERENC RIZNICSENKÓ

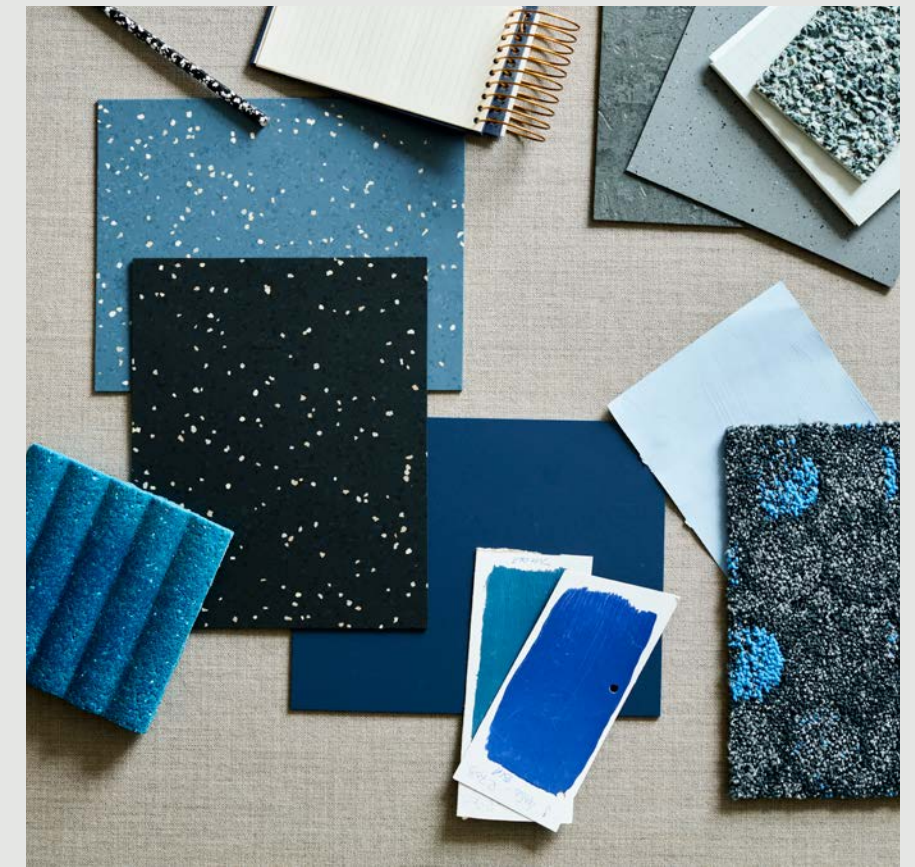

MADE FOR DESIGN

Our customers are sometimes surprised by just how innovative rubber flooring design can get. Surprised, and then impressed. Because at nora, technical experts fluent in design are involved from the very beginning.

Technology and science inform everything we do. From stone, marble and terrazzo-style flooring, to a wide selection of colors, nora has an answer for every space. Trust our design experts to help you perfect the look you want.



MADE FOR SUSTAINABILITY

Why make excuses when we can make change happen? From how we use raw materials to how we design and manufacture our flooring, we look for ways to put the planet first.

This includes resourcing responsibly. We want nora to cost less in the long term – for you, and for the environment. After all, the most sustainable resilient flooring is the one you don't have to replace.

Our company is boldly advancing in our sustainability journey by prioritizing direct carbon reductions over offsets to address the climate crisis. Additionally, nora rubber floor coverings are PVC-free, devoid of other halogenated polymers, and do not contain phthalate plasticizers.



HEALTHCARE


EDUCATION

INDUSTRY &
LIFE SCIENCES

PUBLIC
BUILDINGS

SHOPS &
STORES

TRANSPORTATION

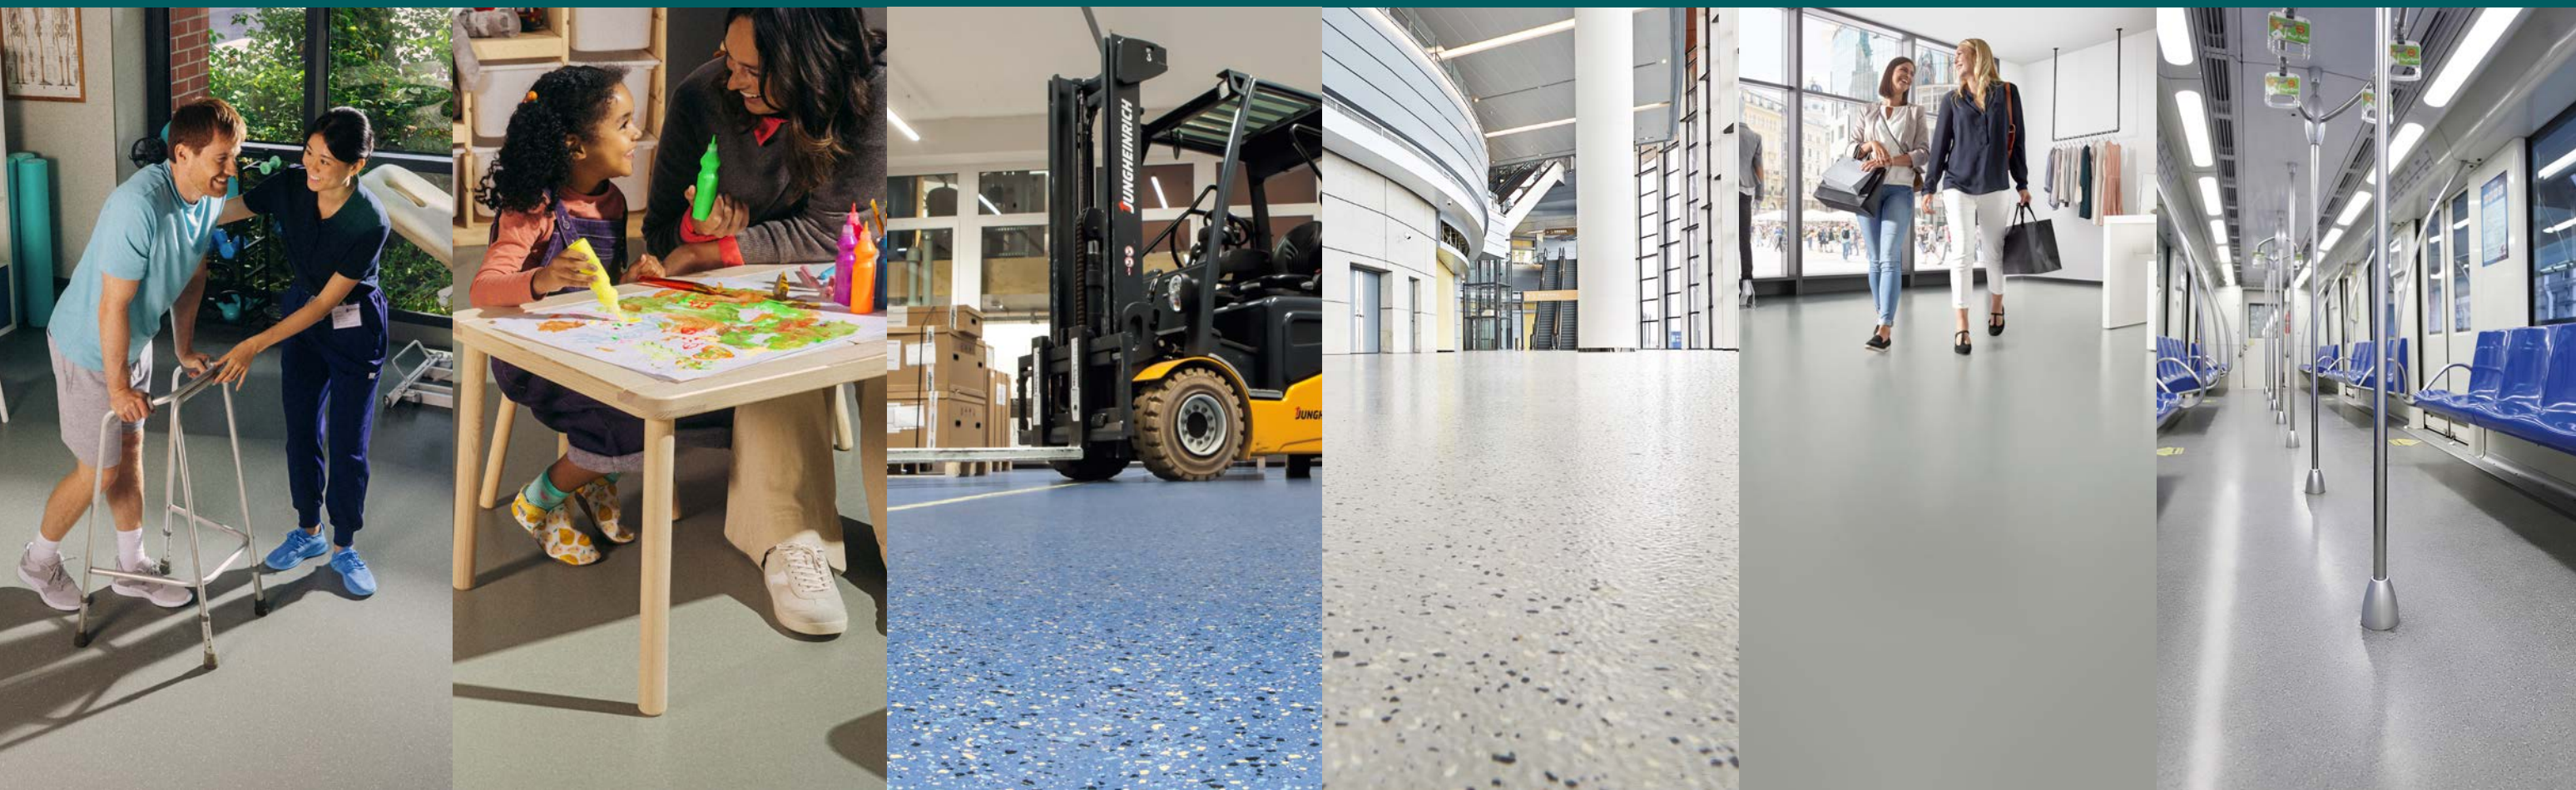

INNOVATIVE SOLUTIONS FOR YOUR INDUSTRY

Building types and market segments

Each project is shaped by the unique demands of different building types and market segments, as well as the innovative spirit of our customers. These factors drive us to deliver products that excel in both appearance and technical quality.

Industry & Life Sciences Photo: © Waldemar Hauke

CERTIFIED FOR YOUR TRUST

Building and corporate certifications, memberships and cooperation agreements

Sustainability criteria are becoming more and more important in the realization of building concepts. In public procurement law they are often mandatory for the tender and decisive for the award of a contract. nora can help you score at green building rating systems.



We are committed to creating a better, healthier, and more sustainable future for our customers and the planet. Our certifications reflect this dedication.

Further information at www.nora.com/certificates

Certifications & transparency documentation



Cradle to Cradle Certified® Silver
Certification of whether a product is safe, circular and responsibly made. Applies to nora 926 and 913 compound flooring and stair treads.



GREENGUARD Gold
All nora floor coverings and adhesives are certified for low VOC emissions.




Greenhealth Approved
All nora 926 and 913 compound floor coverings and stair treads carry the Greenhealth Approved seal, meeting sustainability criteria established by Health Care Without Harm and Practice Greenhealth.



Health Product Declarations (HPDs)
A transparency tool for evaluating whether a product supports Green Chemistry. As part of our work on Health and Materials, Interface continuously reduces the environmental and health impacts of our products through elimination of materials of concern. Applies to nora 926 and 913 compound floor coverings and stair treads, and ESD floor coverings.



Environmental Product Declarations (EPDs)
A statement of product ingredients and environmental impacts over the entire life cycle of a product. A comprehensive life cycle assessment (LCA) is performed to ISO standards to develop an EPD, after which both the EPD and LCA must be third party verified. Applies to nora 926 and 913 compound floor coverings and stair treads, and ESD and acoustic floor coverings.

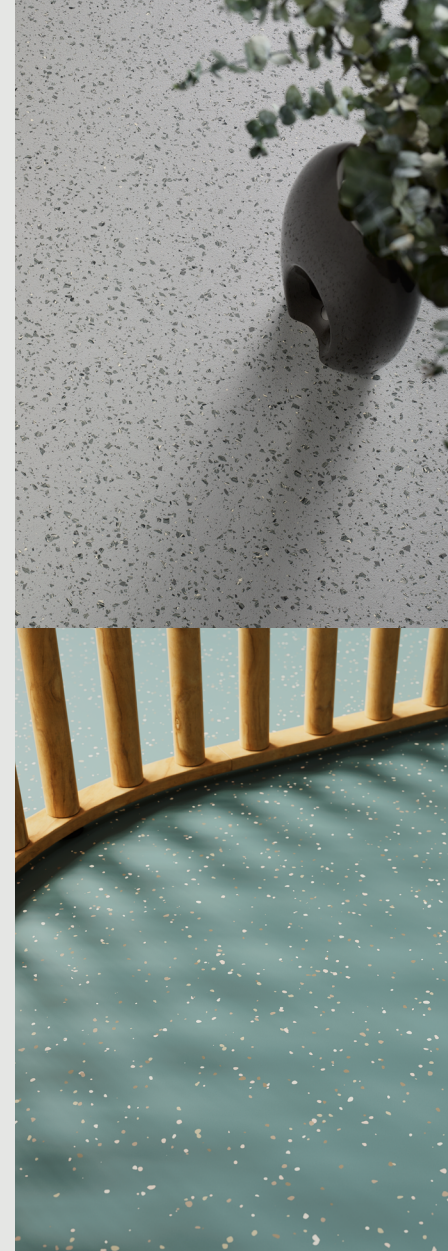

norament: Performance and long life for sophisticated interiors

norament floor coverings are real all-rounders. They are available as tiles and can be installed on surfaces that are subject to the most extreme levels of stress, e.g. industrial spaces. With a service life of 50 years, norament floor coverings are very robust.

noraplan: A wide range of designs and colors for unlimited creativity

noraplan floor coverings are available as both tiles and sheets. They come in a wide range of designs and colors for almost unlimited creativity. These floor coverings have a service life of 40 years and can be used in an extensive scope of environments, including hospitals and educational facilities.

Special floorings

nora has developed various special floor coverings for areas that are subject to special technical standards and requirements. There is a huge range of floorings, including acoustic floor coverings that improve footfall sound absorption by 20 dB, electrostatically dissipative and conductive floorings, as well as special solutions for ice rinks, horse stables or golf facilities.

In addition, nora offers quick installation systems, stairwell solutions, a comprehensive range of flooring accessories and installation materials.

From installation systems to accessories and more, look and feel go hand in hand with technology and science. Explore our product lines.

DESIGNED FOR YOUR NEEDS

FLOORING SELECTOR

The Recommended Application Chart* is based on industry best-practices and intended to be used in conjunction with local building codes/requirements and FGI guidelines. This chart is a working document and will be updated periodically. Specialized site conditions or goals can affect recommendations. Please contact your Healthcare Account Director with questions or additional information.

HEALTHCARE

	norament tiles							
	825 round, hammered	arago, castello, kivo, pado, satura(3)	grano, satura(1)	grano ed	xp	xp trac	920	992, 992 grano
Cafeteria/Visitor Area/Staff Area	—	√	√	—	√	—	—	—
Corridors (excluding main floor)	—	√	√	—	√	—	—	—
Dialysis	—	√ 3	√	—	√	—	—	—
Emergency Departments (excluding Trauma)	—	√	√	—	√	—	—	—
Entrance Areas	√	√	√	—	√	—	—	—
Exam Rooms	—	√	√	—	√	—	—	—
Main Floor Corridors	—	√	√	—	√	—	—	—
Imaging Suites/MRI/Radiology	√ 1	√	√	√ ■	√	—	—	—
ICU/PICU	—	√ 3	√	—	√	—	—	—
Laboratories/Pharmacy	—	—	√	√ ■	√	—	—	—
LDR	—	√	√	—	√	—	—	—
NICU/Neonatal	—	√ 3	√	—	√	—	—	—
Nurses Stations	—	√ 3	√	—	√	—	—	—
Office Areas	—	√	√	—	—	—	—	—
Patient Rooms	—	√	√	—	√	—	—	—
Physical Therapy/Rehabilitation/Gyms	√ 1	—	√	—	√	—	—	√
Ramps (public)	√ ♣	√	√	√	√ ♣	√ ♣	√	√
Service Areas, Corridors, and Elevators	√	√ 3	√	—	√	√	√	√
Stairwells	√ 2	√	√	—	—	—	√	—
Sterile Care Corridors/Sterile Processing	—	—	√	—	√	√	—	—
Surgical Suites (PACUs/Cath Labs - excluding OR/Trauma)	—	—	√	√ ■	√	—	—	—
Surgical Suites (OR/Trauma)	—	—	—	√ ■	√	—	—	—
Waiting Areas	—	√	√	—	√	—	—	—

The Recommended Application Chart* is based on industry best-practices and intended to be used in conjunction with local building codes/requirements and FGI guidelines. This chart is a working document and will be updated periodically. Specialized site conditions or goals can affect recommendations. Please contact your sales representative with questions or additional information.

EDUCATION

	825 round/hammered	arago, castello, kivo, pado, satura(3)	grano, satura(1)	grano ed	xp	xp trac	920	992, 992 grano
Cafeterias/Auditoriums	—	√	√	—	√	—	—	—
Classrooms	—	√	√	—	√	—	—	—
Computer Rooms	—	√	√	√ ■	√	—	—	—
Corridors	—	√	√	—	√	—	—	—
Entrance Areas	—	√	√	—	√	—	—	—
Gyms/Multipurpose	—	√ 3	√	—	√	—	—	√
Laboratories	—	—	√	√ ■	√	—	—	—
Library/Music/Assembly Halls	—	√	√	—	—	—	—	—
Ramps	√ ♣	√	√	√	√ ♣	√ ♣	√	√
Shops/Makerspaces	—	—	√	—	√	—	—	—
Staff Areas	—	√	√	—	—	—	—	—
Stairwells	√ 2	√	√	—	—	—	√	—
Student Housing	—	√	√	—	—	—	—	—

Choose the flooring solutions to meet your needs.

noraplan tiles/sheet				
convia, dariva, environcare, sentica (2 mm)	dariva, environcare, sentica (3 mm)	environcare acoustic, sentica acoustic	environcare ed, sentica ed	unita (2 mm) valua (2 mm/ 3 mm)
√	√	—	—	√
√	√	—	—	√
√	√	—	—	√
√	√	—	—	√ 4
—	√	—	—	√
√	√	—	—	√
√	√	—	—	√
√	√	—	√ ■	√
√	√	√	—	√
√	√	—	√ ■	—
√	√	—	—	√ 4
√	√	√	—	√
√	√	—	—	√
√	√	—	—	√
√	√	—	—	√
√	√	√	√	√
—	—	—	—	—
—	—	—	—	—
—	√	—	—	—
—	√	—	√ ■	—
—	√	—	√ ■	—
√	√	—	—	√

convia, dariva, environcare, sentica (2 mm)	dariva, environcare, sentica (3 mm)	environcare acoustic, sentica acoustic	environcare ed/ sentica ed	unita (2 mm) valua (2 mm/ 3 mm)
√	√	—	—	√
√	√	—	—	√
√	√	—	√ ■	√
√	√	—	—	√
√	√	—	—	√
√	√	—	—	—
√	√	—	√ ■	—
√	√	—	—	√
√	√	√	√	√
√	√	—	—	—
√	√	—	—	√
—	—	—	—	—
√	√	—	—	√

FLOORING SELECTOR

The Recommended Application Chart* is based on industry best-practices and intended to be used in conjunction with local building codes/requirements and FGI guidelines. This chart is a working document and will be updated periodically. Specialized site conditions or goals can affect recommendations. Please contact your Industry Account Director with questions or additional information.

INDUSTRY/ LIFE SCIENCES

	norament tiles							
	825 round, hammered	arago, castello, kivo, pado, satura(3)	grano, satura(1)	grano ed	xp	xp trac	920	992, 992 grano
Assembly	—	—	√	√ ■	√	√	—	—
Atrium	—	√	√	—	√	—	—	—
Cafeteria	√	√	√	—	√	—	—	—
cGMP Production Areas (including production stairwells)	—	—	—	√ ■	√	√	—	—
Cleanroom	—	—	√	√ ■	√	√	—	—
Corridors	√	√	√	√ ■	√	—	—	—
Dressing/Locker Rooms	√	√	√	—	√	√	—	—
Entrance Areas	—	√	√	—	√	—	—	—
ESD Areas	—	—	—	√ ■	—	—	—	—
Laboratories/Research	—	√	√	√ ■	√	—	—	√ ◇
Machine Shop (oil)	—	—	√	√ ■	—	—	√	—
Manufacturing	√	—	√	√ ■	√	√	√	—
Office Areas/Conference Rooms	—	√	√	—	—	—	—	—
Processing Areas	—	—	√	√ ■	√	√	—	—
Stairwells (excluding production stairwells)	√ 2	√	√	—	—	—	√	—
Warehouse (forklift)	—	—	√ †	√	√ †	—	√	√

Updated: February 2025

KEY

- √ = Yes (recommended)
 - = No (not recommended)
 - 1 = Hammered surface is recommended
 - 2 = Possible color variation when pairing norament 825 round/hammered tiles with norament round/hammered stairtreads
 - 3 = Two-tone surface is recommended
 - 4 = Striated profile surface is recommended
 - ◆ = Use for wet areas in proximity to external entrance areas
 - Δ = Not suitable for forklift traffic
 - ◇ = Large animal spaces and LN2 resistance
 - = Use conductive adhesive and copper tape with ed products
 - † = Must use nora® 2-part adhesive
- *Not inclusive of all potential space applications

Choose the flooring solutions to meet your needs.

noraplan tiles/sheet				
convia, dariva, environcare, sentica (2 mm)	dariva, environcare, sentica (3 mm)	environcare acoustic, sentica acoustic	environcare ed, sentica ed	unita (2 mm) valua (2 mm/ 3 mm)
—	√	—	√ ■ Δ	—
√	√	—	—	√
√	√	—	—	√
—	—	—	—	—
√	√	—	√ ■	—
√	√	—	√ ■	√
√	√	—	—	√
√	√	—	—	√
—	—	—	√ ■	—
√	√	—	√ ■	—
—	—	—	—	—
—	—	—	√ ■ Δ	—
√	√	—	—	√
—	—	—	√ ■	—
√	√	—	—	√
—	—	—	—	—

norament®

The classic among rubber floor coverings, norament represents absolute top quality and functionality and is available in a wide range of color and surface designs.

PRODUCT NORAMENT SATURA COLORS 5272 CARINA, 5122 EARTH, 5271 ARIES & 5109 ORION


norament® 825 round

Monochrome with a classic round pastille surface for use in heavy traffic areas.

Art. 1902 ~3.2 mm
~501 mm x 501 mm (~19.72 in x 19.72 in)

These colors can also be delivered as:

 nora QuickShip Program

 Stairtread norament round

— 27.5 mm (~1.08 in) —
— ~0.5 mm —
— ~2.7 mm —
~3.2 mm



5336
Rhino



0884
Dust Grey



5337
Ash



0702
Black



0007
Aluminum



0882
Platinum Grey



0749
Stone Grey



0716
Slate Grey



2070
Sage



5343
Evergreen



0319
Slate Blue



0733
Steel Blue



5338
Biscuit



5341
Maize



PRODUCT NORAMENT 825 ROUND COLOR 0749 STONE GREY




PRODUCT NORAMENT ROUND COLOR 0884 DUST GREY


Flat, direction-oriented relief structure with fine grain design and modern marbling for maximum demands. No two tiles are the same - each tile is totally unique.

norament[®] arago
Art. 3118 ~3.5 mm
□ ~1004 mm x 502 mm (~39.53 in x 19.76 in)

norament[®] arago with beveled edges
Art. 3119 ~3.5 mm
□ ~998 mm x 497 mm (~39.23 in x 19.57 in)

These colors can also be delivered as:

 norament arago nTx

 Stairtread norament arago

Beveled edges are available upon request and offer a natural, individual look. Please call for lead times.

Variations in color and design, even within one production batch, define the product's aesthetic character.



5170
Strength



5171
Fortitude




5172
Stamina



5173
Fervor




5174
Harmony



5175
Unity



5176
Peace



5177
Balance



5178
Calm



5179
Tranquil



5180
Serene



5181
Comfort



PIETARSAARI SCHOOL, FI
© JUKKA-PEKKA JUVONEN

PRODUCT NORAMENT ARAGO



CULTURAL CENTER DE WARANDE, TURNHOUT, BE
© BART GOSSELIN


PRODUCT NORAMENT ARAGO COLOR 5179 TRANQUIL


norament **castello**™

Lightly marbled pattern with movement and variation that mimic nature and a two-tone surface for maximum demands. No two tiles are the same – each tile is totally unique.

Art. 3167 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)

These colors can also be delivered as:


 norament castello nTx

 nora QuickShip Program


Variations in color and design, even within one production batch, define the product's aesthetic character.




5351
Chateau



5352
Citadel




5353
Cortege



5354
Manor



5355
Palazzo



5356
Domus



5357
Palais



5358
Cathedral



THEODOR-HEUSS SCHOOL, WETZLAR, DE
© FRANK SCHULTE

PRODUCT NORAMENT CASTELLO COLOR 5356 DOMUS









PRODUCT NORAMENT CASTELLO COLOR 5357 PALAIS


Rich, contrasting granular design with a hammered surface for use in extremely heavy traffic areas.

norament grano
Art. 1880 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)


norament grano for raised access floors
Art. 1912 ~3.5 mm
□ ~625 mm x 625 mm (~24.6 in x 24.6 in)

These colors can also be delivered as:


-  Special flooring norament grano ed electrostatically dissipative
-  Special flooring norament grano ed electrostatically dissipative for raised access floors
-  norament grano nTx
-  nora QuickShip Program
-  Special flooring norament 992 grano
-  Stairtread norament grano




5301
White Fir



5302
Angelica Root




5303
Frankincense



5304
Black Pepper




5305
Agar



5306
Camphor



5307
Fenugreek



5308
Myrrh




5309
Jasmine



5310
Helichrysum



5311
Copaiba




5312
Vetiver



5313
Marjoram




5314
Henna




5315
Cedarwood




5316
Siberian Fir




5317
Agapanthus




5318
Blue Tansy




5319
Spikenard




5320
Sassafras




5321
Wintergreen




5322
Ylang-ylang



5323
Plumeria



5324
Patchouli




5325
Balsam




5326
Fennel Seed



5327
Tea Tree



5328
Arborvitae




5329
Bergamot



5330
Cassia



5331
Neroli



5332
Geranium



PRODUCT NORAMENT GRANO
COLORS 5302 ANGELICA ROOT, 5303 FRANKINCENSE, 5304 BLACK PEPPER, 5319 SPIKENARD & 5320 SASSAFRAS

norament® **hammered**

Monochrome with a hammered surface for use in heavy traffic areas.

Art. 1910 ~2.7 mm
□ ~502 mm x 502 mm (~19.76 in x 19.76 in)


These colors can also be delivered as:

⚠ Special flooring norament 992

└ Stairtread norament hammered



5336
Rhino



0884
Dust Grey



5337
Ash



0702
Black



0007
Aluminum



0882
Platinum Grey



0749
Stone Grey



0716
Slate Grey



2070
Sage



5343
Evergreen



0319
Slate Blue




0733
Steel Blue



5338
Biscuit



5341
Maize

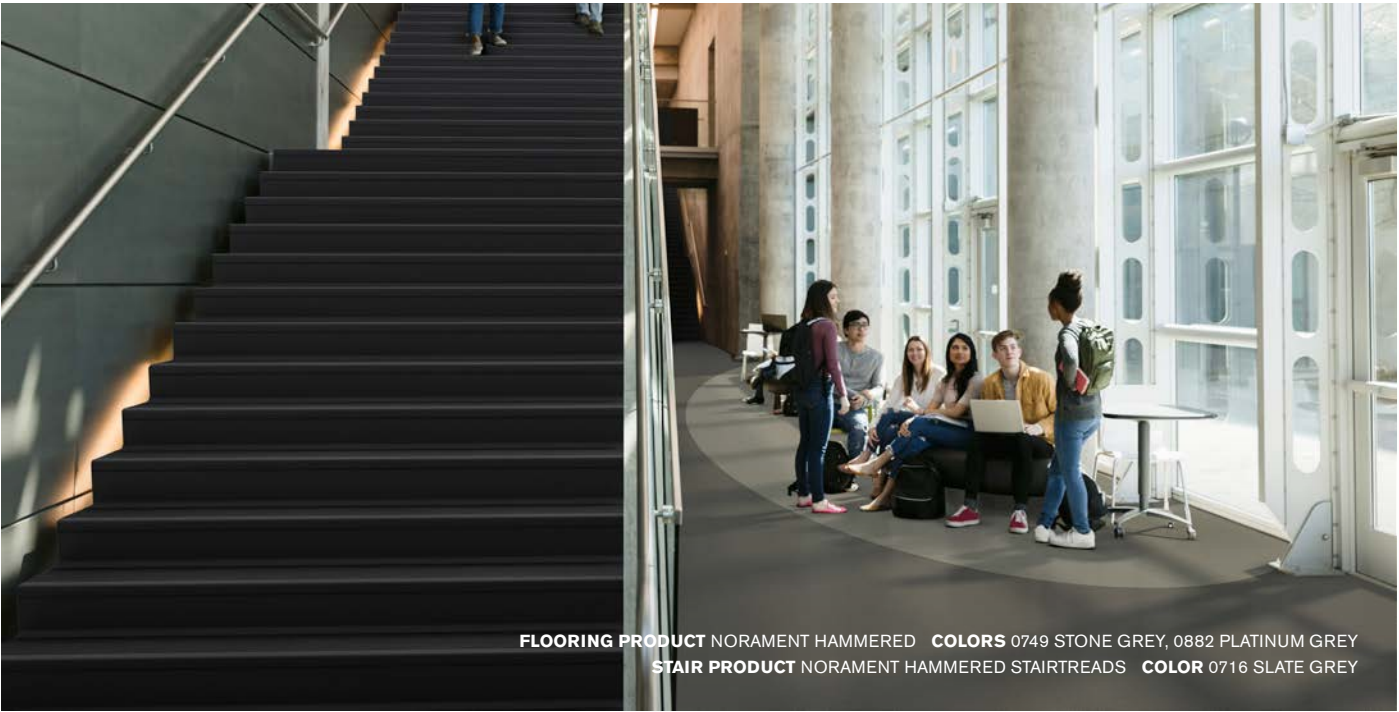

FLOORING PRODUCT NORAMENT HAMMERED **COLORS** 0749 STONE GREY, 0882 PLATINUM GREY
STAIR PRODUCT NORAMENT HAMMERED STAIRTREADS **COLOR** 0716 SLATE GREY



PRODUCT NORAMENT HAMMERED **COLORS** 0702 BLACK, 0884 DUST GREY
PRODUCT NORAMENT 825 ROUND **COLOR** 5341 MAIZE


norament **kivo™**

Contemporary look of concrete with irregular grain design and a slightly structured two-tone surface for use in heavy traffic areas.


Art. 3166 ~2.7 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)
Variations in granulate scattering, even within one production batch, define the product's aesthetic character.



5361
Pumice



5362
Flint




5363
Sharkskin




5364
Pewter




5365
Cement



5366
Cobblestone



5367
Titanium



5368
Granite



PRODUCT NORAMENT KIVO COLOR 5362 FLINT



PRODUCT NORAMENT KIVO COLOR 5362 FLINT

Variegated granular design inspired by ancient terrazzo with a slightly structured two-tone surface for maximum demands.


Art. 3167 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)

*Some of the granules in this color are post-production recycled granules from rubber flooring.


Also available as norament pado™ nTx™.
Minimum quantities required.
Contact your sales representative.




5501
Natural



5502
Coral



5503
Emerald




5504
Coronet




5505
Concrete



*5506
Mineral




*5507
Shadow




5508
Windsor




5509
Rose Quartz



5510
Bluff




*5511
Moon Mist



5512
Spearmint



5513
Nightshade



5514
Laurel



*5515
Forest



*5516
Galaxy



PRODUCT NORAMENT PADO COLOR 5502 CORAL



VETERINARY CLINIC OTTERSBERG, DE
© CASPAR SESSLER

PRODUCT NORAMENT PADO COLOR 5502 CORAL


Tone-on-tone granular design with a hammered or two-tone surface for use in extremely heavy traffic areas.

Hammered surface
Art. 1880 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)

Two-tone surface
Art. 3167 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)

These colors can also be delivered as:

 nora QuickShip Program

 Stairtread norament satura


norament® **satura™** hammered surface



5105
Cygnus




5106
Vulpecula



5107
Callisto




5109
Orion




5110
Ara




5111
Castor




5113
Sagitta



5114
Circinus



5115
Hercules



5116
Arcturus




5102
Grus




5270
Tucana



5271
Aries




5128
Delphinus



5122
Earth



5272
Carina




5127
Vela




5273
Dorado




5274
Apus



5189
Virgo



5275
Leo




5276
Phoenix


norament® **satura™** two-tone surface




5109
Orion




5110
Ara



5111
Castor



5272
Carina



5273
Dorado



5115
Hercules



PRODUCT NORAMENT SATURA COLORS 5105 CYGNUS, 5127 VELA & 5128 DELPHINUS



PRODUCT NORAMENT SATURA COLORS 5276 PHOENIX, 5274 APUS, 5272 CARINA & 5114 CIRCINUS

noraplan®

noraplan floor coverings are available as sheets or tiles in a variety of designs and colors for extensive design possibilities.


The simple, smart flooring solution. Streamlined, purposeful design and the performance of nora flooring, all at our best value. A solid base color and dirt-concealing neutral granules with a smooth surface for use in heavy traffic areas.

Art. 170F ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)

Art. 270F ~2 mm
~610 mm x 610 mm (~24.015 in x 24.015 in)
15 = 5.58 m² per carton

These colors can also be delivered as:

 nora QuickShip Program

 Also available as noraplan convia™ nTx™. Minimum quantities required. Contact your sales representative.



7351
Pearl Grey



7352
Lava Rock



7353
Basalt



7354
Pitch



7355
Silver Sand



7356
Shale



7357
Smokey Ash



7358
Wrought Iron



7359
Iced Taupe



7360
Stone Khaki



7361
Warm Sand



7362
Putty



7363
Buttermilk



7364
Pale Green



7365
Dusty Mint



7366
Patina Green



7367
Adobe



7368
Powder Blue



7369
Hydrangea



7370
Pigeon Blue



7374
Luminous Red



7372
Chartreuse



7373
Carolina Blue




7371
Honey



7375
Carmine Red



7376
Billiards



7377
Grecian Blue



7378
Violet Blue



PRODUCT NORAPLAN CONVIA
COLORS 7377 GRECIAN BLUE, 7373 CAROLINA BLUE & 7351 PEARL GREY

noraplan **dariva™**

Organic, nature inspired design with varying degrees of contrast in a smooth surface for heavy traffic areas.

Art. 160F ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)

Art. 161F ~3 mm
~12 m x 1.22 m (~39.37 ft x 48 in)

Also available as noraplan dariva™ nTx™. Minimum quantities required. Contact your sales representative.



7161
Pine Nut



6716
Almond



6714
Mushroom



6713
Birch



7164
Hickory



6718
Walnut



6721
Sandbar




6709
Smoke




7168
Argan



6715
Pecan



6722
Pinecone



7169
River Birch




7173
Red Maple



6719
Cocoa Bean



6723
Bark



6710
Charcoal



7162
Cottonwood




6708
Beach Wood



7163
Plantain



7165
Pepperwood



7166
Palmetto




7167
Juniper




7170
Acai Berry




7171
Blue Spruce




7172
Sycamore



7174
Bluebell



7175
Wisteria



7176
Hemlock



PRODUCT NORAPLAN DARIVA COLORS 6722 PINECONE & 7173 RED MAPLE



PRODUCT NORAPLAN DARIVA COLORS 7165 PEPPERWOOD & 7176 HEMLOCK

noraplan **environcare™**

A changing base color consisting of three harmoniously matched color components and characteristic granules in a smooth surface for heavy traffic areas.

Art. 1462 ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)

Art. 2462 ~2 mm
~610 mm x 610 mm (~24.015 in x 24.015 in)
15 = 5.58 m² per carton

Art. 1463 ~3 mm
~12 m x 1.22 m (~39.37 ft x 48 in)

Art. 2463 ~3 mm
~610 mm x 610 mm (~24.015 in x 24.015 in)
10 = 3.72 m² per carton

These colors can also be delivered as:

- Special flooring norament environcare ed electrostatically dissipative
- Special flooring noraplan environcare acoustic footfall-sound-absorbing
- norament environcare nTx
- nora QuickShip Program



7031
Baseball Game



7032
Sleigh Ride



7033
Tail Gating




7034
Fireworks



7035
Snow Shoeing



7036
Clam Bake



7037
Fun Run



7038
Hide-n-Seek



7039
Baby Shower




7040
Bike Ride




7041
Whale Watch



7042
Star Gazing



7043
Ice Fishing



7044
Egg Hunt



7045
Ice Skating



7046
Drive-In




7047
Skiing



7048
Pie Contest



7049
Summer Camp



7050
Petting Zoo



7051
Snowball Fight



7052
Sledding



7053
Pot Luck



7054
Book Club



7055
Champagne Toast



7056
Antiquing



7057
Cookie Swap



7058
Beach Day



7059
Candlelight Dinner



7060
Garden Party



7061
Farmers Market



7062
Football



7063
Car Wash



7064
Water Park



7065
Pool Party



7066
Parade



7067
Yard Games



7068
Mini Golf



7069
Leap Frog



7070
Tennis Match




7071
Corn Maze



7072
Leaf Peeping



7073
Apple Picking



7074
Music Festival



7075
Food Coma



7076
County Fair



7077
Graduation



7078
Haunted House

Tone-on-tone design with harmoniously matching color components in a smooth surface for heavy traffic areas.

Art. 1700 ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)

Art. 2700 ~2 mm
~610 mm x 610 mm (~24.015 in x 24.015 in)
15 = 5.58 m² per carton

Art. 1701 ~3 mm
~12 m x 1.22 m (~39.37 ft x 48 in)

Art. 2701 ~3 mm
~610 mm x 610 mm (~24.015 in x 24.015 in)
10 = 3.72 m² per carton

These colors can also be delivered as:

- Special flooring noraplan sentica ed electrostatically dissipative
- Special flooring noraplan sentica acoustic footfall-sound-absorbing
- noraplan sentica nTx
- nora QuickShip Program



6500
Cotton Candy



6501
Prom



6502
Vacation



6503
Indulgence



6504
Down Feathers




6505
Silk



6506
Cashmere



6507
Old Oak



6508
Wool



6509
Sand Box



6510
Dinner Rolls



6511
Clydesdale



6512
Sunrise



6513
Hayride



6514
Heat Wave



6515
Barbeque



6516
Aloe



6517
Cut Grass



6518
First Day



6519
Picnic



6520
Snow Day



6521
Sunday Paper



6522
Expedition



6523
Road Trip



6524
Frost Bite



6525
Ocean Mist



6526
Mountain Air



6527
Deep Sea




© ENRIQUE SAMSON, TVSDDESIGN

PRODUCT NORAPLAN SENTICA COLORS 6520 SNOW DAY, 6530 WATERFALL



6528
Ice Cube



6529
Surf



6530
Waterfall



6531
Regatta



6532
Zest



6533
Valentine



6534
Carnival



6535
Destination



6536
Wheat Fields




6537
Camp Fire


The perfect combination of resilient rubber and randomly dispersed granite chips in a smooth surface for heavy traffic areas.

Art. 1640 ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)


As granite is a natural product, slight color variations are possible, even within one production batch.




7105
Push-N-Pull




7106
Right-N-Left




7107
High-N-Low




7108
Near-N-Far




7113
Ask-N-Tell




7117
Open-N-Shut




7115
Hot-N-Cold




7119
Wet-N-Dry




7101
Here-N-There




7102
Up-N-Down




7103
Come-N-Go




7104
Bitter-N-Sweet




7114
All-N-None




7118
Dusk-N-Dawn




7120
Night-N-Day




7116
Fire-N-Ice




7112
Now-N-Then



7111
Back-N-Front



7109
North-N-South



7110
East-N-West



A linear surface structure and nature inspired marbled detail for heavy traffic areas.

Art. 174A ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)

Art. 272A plank ~2 mm
~610 mm x 205 mm (~24.015 in x 8.07 in)
36 = 4.50 m² per carton

Art. 273A plank ~2 mm
~610 mm x 305 mm (~24.015 in x 12 in)
24 = 4.46 m² per carton

Art. 274A plank ~2 mm
~1220 mm x 405 mm (~48.03 in x 15.94 in)
12 = 5.92 m² per carton

Art. 175A ~3 mm
~12 m x 1.22 m (~39.37 ft x 48 in)

Art. 275A plank ~3 mm
~610 mm x 205 mm (~24.015 in x 8.07 in)
36 = 4.50 m² per carton

Art. 276A plank ~3 mm
~610 mm x 305 mm (~24.015 in x 12 in)
24 = 4.46 m² per carton

Art. 277A plank ~3 mm
~1220 mm x 405 mm (~48.03 in x 15.94 in)
12 = 5.92 m² per carton


Also available as noraplan® valua™ nTx™.
Minimum quantities required.
Contact your sales representative.



6708
Beach Wood



6709
Smoke



6710
Charcoal



6713
Birch



6714
Mushroom



6718
Walnut



6720
Macadamia



6721
Sandbar



6722
Pine Cone



6723
Bark



DEACONESS GATEWAY HOSPITAL, NEWBURGH, IN
© MICHAEL WHEATLEY

PRODUCT NORAPLAN VALUA COLOR 6708 BEACH WOOD



ST. AUGUSTINE PREPARATORY ACADEMY, MILWAUKEE, WI

PRODUCT NORAPLAN VALUA COLOR 6709 SMOKE & 6710 CHARCOAL

nora® special floorings


We developed our special floorings for areas subject to special technical standards and requirements.

PRODUCT NORAMENT XP COLOR 5109 ORION

Monochrome with a classic round pastille surface for use in extra heavy traffic areas subject to special fire protection requirements.

Art. 354 ~4 mm
□ ~1006 mm x 1006 mm (~39.61 in x 39.61 in)

These colors can also be delivered as:

 Stairtread norament 920

- Increased safety thanks to high fire-retardant properties
- Ideal flooring for emergency exits and stairways
- IMO Certified floor covering
- Meets Class A (ASTM E84 Tunnel Test) with a flame spread rate of 15 and smoke development of 300
- CAN/ULC S102.2 Surface Burning Characteristics test results: FSR of 5 and SDC of 30 achieved
- For use in egress areas above 75 feet according to International Building Code (IBC)
- Passes ISO 26987 for oil and grease resistance

└ 27.5 mm (~1.08 in) ┐
┌ ~0.5 mm ▴ ~4 mm
└ ~3.5 mm ▾ ~4 mm



0884
Dust Grey



0749
Stone Grey



0702
Black



0862
Azure Blue

Designed to meet the extreme wear-resistant requirements of ice blades, spikes, cleats and free weights. norament 992 contains at least 11% post-production recycled content.

norament 992
Art. 1956 ~9 mm
□ ~1002 mm x 1002 mm (~39.45 in x 39.45 in)


norament 992 grano
Art. 1955 ~9 mm
□ ~1002 mm x 1002 mm (~39.45 in x 39.45 in)

norament® 992 hammered surface




0702
Black


norament® 992 grano™ hammered surface




5302
Angelica Root




5303
Frankincense




5304
Black Pepper



5317
Agapanthus



5319
Spikenard



5308
Myrrh



GEZAMELIJKE BRANDWEER, ROZENBURG, NL
© BEELDWERKEN

COLOR 0702 BLACK



SAP-ARENA, MANNHEIM, DE
© ELMAR WITT


PRODUCT NORAMENT 992 GRANO COLOR 5304 BLACK PEPPER

norament® **xp™/xp trac™**

A granular design for use in high-performance workspaces. Its high-impact, dense structure resists the stresses of extreme weight and harsh chemicals.

norament xp
Art. 1880 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)







These colors can also be delivered as:

 noraplan xp nTx

norament® **xp™** hammered surface

 5309 Jasmine	 5109 Orion	 5106 Vulpecula	 5306 Camphor
 5102 Grus	 5110 Ara	 5111 Castor	 5303 Frankincense
 5310 Helichrysum	 5114 Circinus	 5107 Callisto	 5304 Black Pepper
 5330 Cassia	 5127 Vela	 5119 Mars	 5319 Spikenard


norament® **xp trac™** grain structure surface

 5306 Camphor	 5303 Frankincense	 5304 Black Pepper	 5309 Jasmine
 5330 Cassia	 5319 Spikenard		

A granular design with an enhanced surface profile for use in facilities and applications challenged with recurrent wet areas, requiring enhanced slip resistance.

norament xp trac
Art. 325 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)

These colors can also be delivered as:


 noraplan xp trac nTx



PRODUCT NORAMENT XP TRAC COLOR 5303 FRANKINCENSE

Electrostatically dissipative “ed” flooring for optimum ESD protection of electronic devices, equipment, and people. Protects against electric shock, resists most oils and greases and is suitable for forklift truck areas.

norament grano ed
Static-dissipative
Art. 1880 ~3.5 mm
□ ~1002 mm x 1002 mm (~39.45 in x 39.45 in)


norament grano ed 
Static-dissipative for raised access floors
Art. 1912 ~3.5 mm
□ ~625 mm x 625 mm (~24.6 in x 24.6 in)


These colors can also be delivered as:


 nora QuickShip Program




norament® **grano™ ed** hammered surface





5301
White Fir  




5306
Camphor  



5317
Agapanthus 



5318
Blue Tansy 




5329
Bergamot





5325
Balsam



5321
Wintergreen



5304
Black Pepper  

Quick-Installation of nora® ESD floorings

nora ESD floor coverings can be quickly and easily installed using nora dryfix ed. It accelerates the installation and allows for immediate trafficking. See nora Installation & Care section for more details.



PRODUCT NORAMENT GRANO ED



KISICO PRODUCTION, OESTRICH WINKEL, DE
© MARKUS BACHMANN

PRODUCT NORAMENT GRANO ED COLOR 5318 BLUE TANSY

Electrostatically dissipative “ed” flooring for optimum ESD protection of electronic devices, equipment, and people. Protects against electric shock, and resists most oils and greases.















noraplan environcare ed
Art. 1390 ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)

Art. 2390 ~2 mm
~610 mm x 610 mm (~24.015 in x 24.015 in)
15 = 5.58 m² per carton

Art. 1523 ~3 mm
~12 m x 1.22 m (~39.37 ft x 48 in)



noraplan **environcare™ ed** smooth surface

 7031 Baseball Game	 7033 Tail Gating	 7035 Snow Shoeing	 7036 Clam Bake
 7044 Egg Hunt	 7045 Ice Skating	 7051 Snowball Fight	 7052 Sledding
 7055 Champagne Toast	 7056 Antiquing	 7065 Pool Party	 7066 Parade
 7067 Yard Games	 7076 County Fair		



BERGMANN CLINICS LOCATIONS NAARDEN, NL
© BEELDWERKEN

PRODUCT NORAPLAN ENVIRONCARE ED

noraplan® **sentica™ ed** smooth surface

noraplan sentica ed
Art. 1702 ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)

Art. 2702 ~2 mm
~610 mm x 610 mm (~24.015 in x 24.015 in)
15 = 5.58 m² per carton

Art. 1703 ~3 mm
~12 m x 1.22 m (~39.37 ft x 48 in)




 6520 Snow Day	 6521 Sunday Paper	 6522 Expedition	 6523 Road Trip
 6508 Wool	 6509 Sand Box	 6504 Down Feathers	 6505 Silk
 6517 Cut Grass	 6513 Hayride	 6529 Surf	 6530 Waterfall



BASF MEDICAL CENTER, DE
© THILO ROSS

PRODUCT NORAPLAN SENTICA ED COLOR 6523 ROAD TRIP

For a high footfall sound absorption improvement of ΔLw 20dB.
noraplan acoustic contains 29% post-production recycled content.

noraplan environcare acoustic
Art. 1420 ~4 mm
 ~12 m x 1.22 m (~39.37 ft x 48 in)

All noraplan acoustic flooring must be welded with nora heat weld.

noraplan® **environcare™ acoustic** smooth surface



7055
Champagne Toast



7056
Antiquing



7032
Sleigh Ride




7033
Tail Gating



7051
Snowball Fight



7052
Sledding



7035
Snow Shoeing



7036
Clam Bake



7071
Corn Maze



7072
Leaf Peeping



7067
Yard Games



7065
Pool Party

noraplan® **sentica™ acoustic** smooth surface



6524
Frost Bite



6520
Snow Day



6521
Sunday Paper



6522
Expedition



6508
Wool



6513
Hayride



6505
Silk




6510
Dinner Rolls



6516
Aloe




6517
Cut Grass



6530
Waterfall



6531
Regatta

noraplan sentica acoustic
Art. 1705 ~4 mm
 ~12 m x 1.22 m (~39.37 ft x 48 in)

All noraplan acoustic flooring must be welded with nora heat weld.



UNIVERSITY OF IOWA HOSPITALS AND CLINICS (UIHC),
IOWA CITY, IOWA
© WAYNE JOHNSON, MAIN STREET STUDIO


PRODUCT NORAPLAN ENVIRONCARE ACOUSTIC

nora® QuickShip

Available to ship within 10 days, the nora QuickShip program offers an array of norament and noraplan products in a variety of color and product combinations, including ESD flooring, stair treads, weld, and cove base options.



norament 825 round
Art. 1902 ~3.2 mm
□ ~601 mm x 501 mm (~19.72 in x 19.72 in)
└─ 27.5 mm (~1.08 in) ─┐
┌─ ~0.5 mm ─┐
└─ ~2.7 mm ─┐
└─ ~3.2 mm ─┐

norament round stairtreads 
Art. 465 – width 1285 mm (~50.59 in)

norament **825 round**



0884
Dust Grey



0882
Platinum Grey




0749
Stone Grey



0716
Slate Grey



0702
Black



norament **castello**

norament castello
Art. 3167 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)




5355
Palazzo




5354
Manor


norament **grano**

norament grano
Art. 1880 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)


norament grano ed 
Static-dissipative
Art. 1880 ~3.5 mm
□ ~1002 mm x 1002 mm (~39.45 in x 39.45 in)

norament grano stairtreads 
Art. 479 – width 1285 mm (~50.59 in)


Stair tread colors 5303 and 5304 can be supplied with textured visually impaired strips in color 8015 Black.




5301
White Fir




5302
Angelica Root




5303
Frankincense




5304
Black Pepper




5306
Camphor




5319
Spikenard




5320
Sassafra



5329
Bergamot




5332
Geranium



norament **satura**

norament satura
Art. 1880 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)


norament satura stairtreads 
Art. 479 – width 1285 mm (~50.59 in)




5110
Ara




5111
Castor



5107
Callisto



5116
Arcturus



PRODUCT NORAMENT GRANO COLOR 5303 FRANKINCENSE

noraplan convia
Art. 270F ~2 mm
□ ~610 mm x 610 mm (~24.015 in x 24.015 in)
15 □ = 5.58 m² per carton

noraplan **convia**



7360
Stone Khaki



7355
Silver Sand



7356
Shale



7352
Lava Rock



7366
Patina Green



7370
Pigeon Blue


noraplan **environcare** 3 mm color range




7031
Baseball Game



7035
Snow Shoeing




7036
Clam Bake



7051
Snowball Fight



7052
Sledding



7053
Pot Luck



7061
Farmers Market



7065
Pool Party



7073
Apple Picking

noraplan **environcare** 2 mm color range



7031
Baseball Game



7032
Sleigh Ride

noraplan environcare
Art. 1465 ~2 mm
□ ~15 m x 1.22 m (~49.21 ft x 48 in)



PRODUCT NORAPLAN CONVIA COLOR 7360 STONE KHAKI

noraplan **sentica** 3 mm Color Range



6505
Silk



6506
Cashmere



6520
Snow Day



6524
Frost Bite



6525
Ocean Mist



6526
Mountain Air

noraplan sentica
Art. 1701 ~3 mm
□ ~12 m x 1.22 m (~39.37 ft x 48 in)

noraplan **sentica** 2 mm Color Range



6520
Snow Day

noraplan sentica
Art. 1700 ~2 mm
□ ~15 m x 1.22 m (~49.21 ft x 48 in)

nora cold weld
Art. 928
300 ml (10 fl oz)
~50-60 LF per unit

Please remember, we have joint cutters,
spatulas and cold weld tape available for order.

nora cold weld













			
0702	0716	0749	0882
			
0884	1253	2382	2666
			
2781	2897	2931	4881
			
5107	5110	5111	5116
			
5121	5301	5302	5303
			
5306	5319	5354	5355
			
6505	6506	6520	6524
			
6525	6708	7052	7053
			
7061	7065	7073	

nora sanitary base

nora sanitary base
Art. 817 – S 3019 D
Piece Length: 10 m (~32.81 ft)

*Conforms to ASTM F1861 – Standard
Specification for Resilient Wall Base, Type TP:
Thermoplastic Rubber, Group 1

For floor covering thicknesses from
3.0 to 3.5 mm (.12 in to .14 in).

			
2945	5111	5303	5304
			
5306	5319	6505	6506
			
6524	7035	7036	7052

nora QuickShip Guidelines:

- Timing: Ships within 10 business days
- Maximum Order Quantities
 - noraplan and norament flooring (neutral colors): up to 600 m2 (~6,458 SF)
 - noraplan and norament flooring (accent colors): up to 100 m2 (~1,076 SF)
 - norament stairtreads: up to 75 pieces
 - nora cold weld: up to 15 units
 - nora sanitary base: up to 5 rolls
- Minimum Order Quantities
 - noraplan rolls: one roll
 - noraplan tiles: one box
 - norament tiles: one tile
 - norament stairtreads: one piece
 - nora cold weld: one unit
 - nora sanitary base: one roll
- Product sizes standard as published; no cutting
- Except where noted, norament stairtreads are 4 ft standard treads only; no routing or VI
- No overages
- No holds
- No allocations to an order for more than 48 hours
- Inventory allocated upon credit approval
- Consider transit times for shipments to Canada and Latin America

nora® stairwell solutions

The first choice for smart, hard-working stairwells, nora offers a wide range of design options for floor coverings and stairs that can complement any interior.

Depending on your needs, we provide two distinct stairwell solutions. For angled stairs, the one-piece norament stairtreads are ideal. For other stairwells, your preferred nora floor covering can be used in combination with a stair nosing.


norament® **stairtreads**

Our one-piece stair coverings include stair nosing, riser and tread and are built to fit straight steps with an angled edge. norament stairtreads are designed to withstand extremely heavy traffic while maintaining their good looks.

Monochrome with a classic round pastille surface for special fire-protection requirements.

norament 920 stairtreads ~4.5 mm
Art. 465 – width 1285 mm (~50.59 in)

- Increased safety thanks to high fire-retardant properties
- Meets Class A (ASMT E84 Tunnel Test) with a flame spread rate of 15 and smoke development of 300
- CAN/ULC S102.2 Surface Burning Characteristics test results: FSR of 5 and SDC of 30 achieved
- Ideal for emergency exits and stairways
- For use in egress areas above 75 feet according to International Building Code (IBC)
- Class A photoluminescent visually impaired strips available

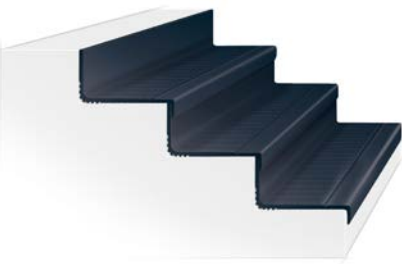

norament® **920 stairtreads (Class A fire-rated)** 🔥



0884
Dust Grey




0749
Stone Grey



0702
Black



0862
Azure Blue



norament® **arago™ stairtreads**

Flat, direction-oriented relief structure with fine grain design and modern marbling.

norament arago stairtreads ~5 mm
Art. 3170 – width 1285 mm (~50.59 in)
Art. 3171 – width 1614 mm (~63.54 in)
Art. 3172 – width 2004 mm (~78.89 in)


Variations in color and design, even within one production batch, define the product's aesthetic character.




5171
Fortitude




5172
Stamina



5175
Unity




5177
Balance



5178
Calm




5179
Tranquil



norament® **stairtreads**













Rich, contrasting granular design
with a hammered surface.

norament grano stairtreads ~5 mm
Art. 479 – width 1285 mm (~50.59 in)
Art. 468 – width 1614 mm (~63.54 in)
Art. 469 – width 2004 mm (~78.89 in)












These colors can also be delivered as:
 nora QuickShip Program (Art. 479 only)




norament® **grano™ stairtreads**

			
5301 White Fir	5302 Angelica Root	5303 Frankincense	5304 Black Pepper
			
5313 Marjoram	5314 Henna	5315 Cedarwood	5308 Myrrh
			
5329 Bergamot	5325 Balsam	5317 Agapanthus	5318 Blue Tansy

norament® **hammered stairtreads**

			
5336 Rhino	0884 Dust Grey	5337 Ash	0702 Black
			
0007 Aluminum	0882 Platinum Grey	0749 Stone Grey	0716 Slate Grey
			
5343 Evergreen	0319 S Slate Blue	0733 Steel Blue	



Profile applies to norament grano and
norament hammered stairtreads



SYRACUSE UNIVERSITY, NY
© JOHN WAGMAN GLOBAL PHOTO ASSOCIATES

PRODUCT NORAMENT GRANO STAIRTREADS


norament® **stairtreads**

Monochrome with a classic round
pastille surface.

norament round stairtreads ~4.5 mm
Art. 465 – width 1285 mm (~50.59 in)
Art. 466 – width 1614 mm (~63.54 in)
Art. 467 – width 2004 mm (~78.89 in)

These colors can also be delivered as:

 nora QuickShip Program (Art. 465 only)

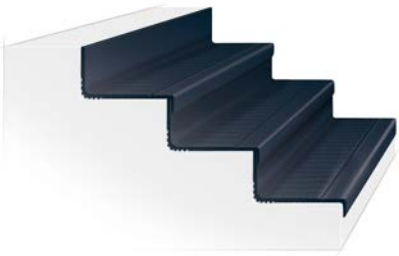

norament® **round stairtreads**



5336
Rhino



0884
Dust Grey



5337
Ash



0702
Black



0007
Aluminum



0882
Platinum Grey



0749
Stone Grey



0716
Slate Grey




5343
Evergreen



0319
Slate Blue



0733
Steel Blue




norament® **satura™ stairtreads**

Tone-on-tone granular design with a
hammered surface.

norament satura stairtreads ~5 mm
Art. 479 – width 1285 mm (~50.59 in)
Art. 468 – width 1614 mm (~63.54 in)
Art. 469 – width 2004 mm (~78.89 in)

These colors can also be delivered as:


 nora QuickShip Program (Art. 479 only)




5110
Ara



5114
Circinus



5115
Hercules




5116
Arcturus



5102
Grus




5107
Callisto



5127
Vela



5273
Dorado



nora® stair nosings

Bring the full repertoire of nora floor coverings to more types of stairs, including specialty stairs like spiral staircases, by pairing nora stair nosings with nora flooring. nora stair nosings are designed for multiple flooring thicknesses and can be used on noraplan or norament floor coverings. Once the flooring is pre-cut to the dimension of an individual stair tread, the nora stair nosing insertion lip locks the flooring into place and protects the cut edge. And, nora stair nosings are both impact and shock resistant.

1 rubber stair nosing

Art. 805 – T 5049
Piece Length: 2.5 m (~8.2 ft)

For use on noraplan and norament floor coverings.


0702	0749	5301	5310
0716	0884	5305	6179

2 aluminum stair nosing

Art. 6648 – T 1203
Piece Length: 2.7 m (~8.9 ft)

For use with norament floor coverings.
Check local statutes to ensure code compliance.

Color: Silver anodized aluminum

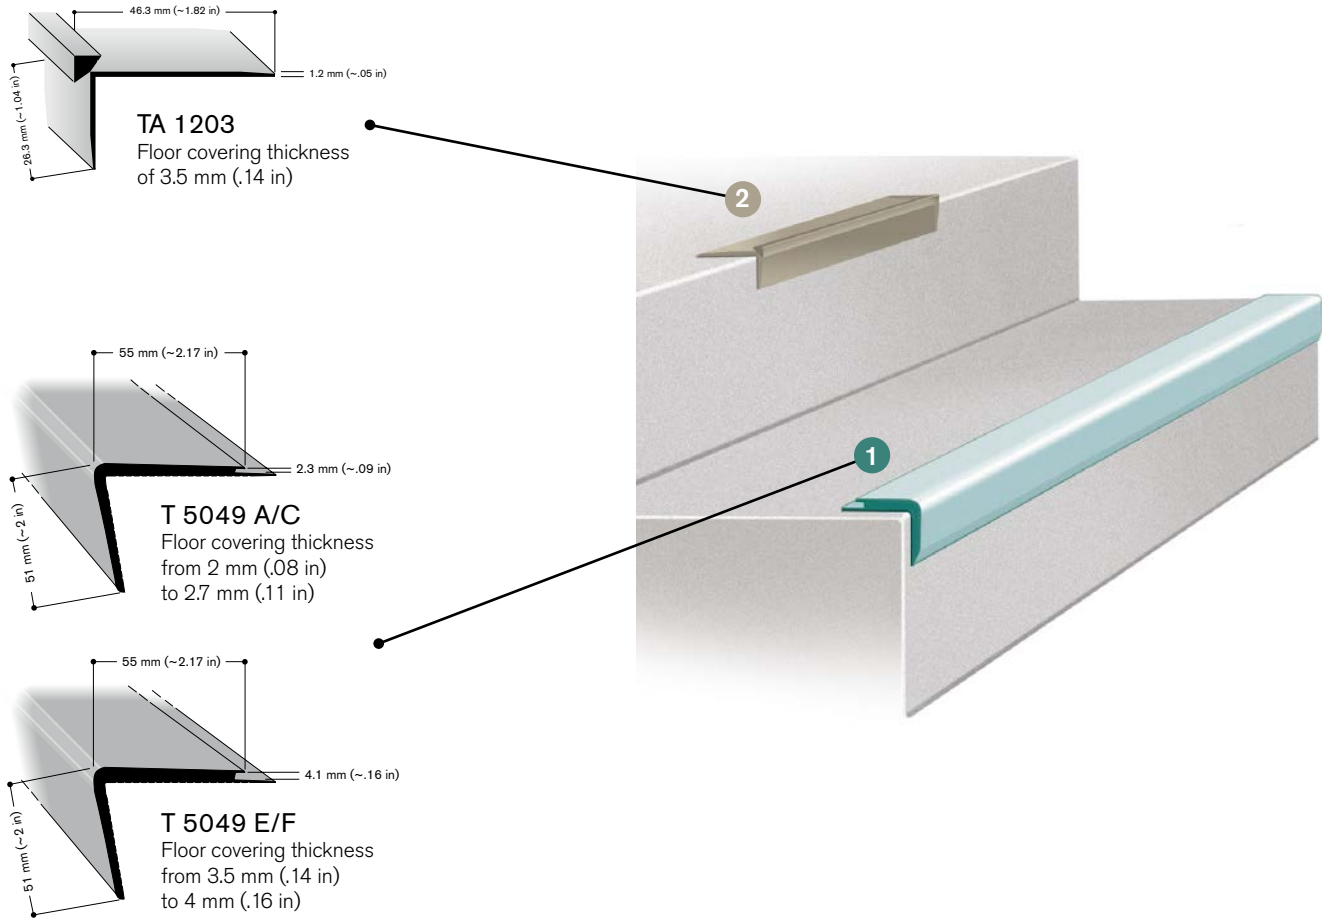

nora® visually impaired strips

nora visually impaired strips, offered in textured or smooth surfaces in an array of high-contrast colors, may be inserted into any of our one-piece stair coverings. A photoluminescent option is also available on request.


Piece Width: 50.8 mm (~2 in)

Textured VI:

8011 Coral Red	8012 Safety Yellow
8014 Ocean Grey	8015 Black
8016 Nite Glow	

Smooth VI:

0122 Light Grey	0895 Yellow
0597 Black	

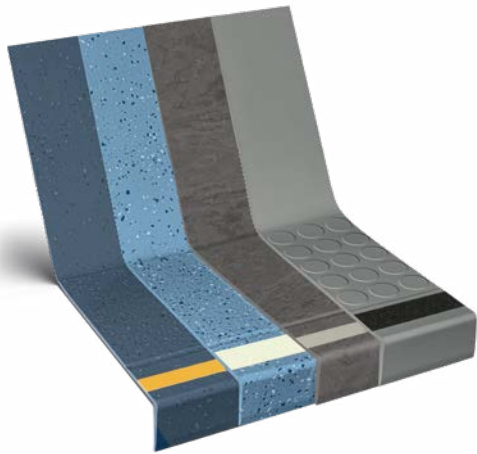

To ensure safety and performance, nora epoxy stair filler is used under the stairtread nosing when installed with nora visually impaired strips. See below.

nora® stepfix™ 240

nora stepfix 240 is an innovative and cost-effective adhesive tape suitable for new builds and renovation projects. Specifically designed for norament stairtreads, nora stepfix 240 makes installation 3-5 times faster than conventional installation methods, and the process is odorless, clean, and easy.

You can dry-fit the tread right on the covered adhesive tape, and stairs can be walked on immediately after installation. And nora stepfix 240 is GREENGUARD Gold certified for low VOC emissions, helping to improve indoor air quality.

Art. 907
Dimension of rolls: 240 mm (~9.45 in) width x 50 m (~164 ft) length = 12 m² (~129 SF)



nora® epoxy stair filler

A solvent-free, non-flammable, high-performance epoxy that sets to a hard, permanent bond. Use on stairs with greater than ¼ inch radius or damaged edges to provide support under the stairtread nosing. Required for nora visually impaired strips.

- 13.5 oz dual cartridge applicator with special mixer application tip
- Two cartridge caulking gun required
- Coverage: ~40 LF with a .25 inch bead

Art. 500875




nora® metal repair stair angle

Prep rounded, wavy, damaged or bowed steps with the nora metal repair stair angle prior to installing nora stairwell products.

- Piece Length: 1 m (~39.37 in)
- Screws: middle of hole to middle of hole 63.5 mm (~2.5 in)

Art. 6637
On stairs with round nosing, nora metal repair stair angle and/or nora epoxy stair filler must be used to fill the void.

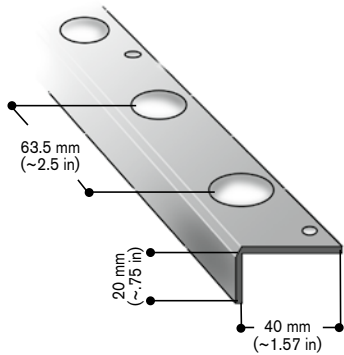


MILFORD HIGH SCHOOL, HIGHLAND, MI

PRODUCT NORAMENT GRANO STAIRTREAD
COLOR 5304 BLACK PEPPER

nora[®] installation & care

Our nora install and care products ensure your floor installation is a success and your floor looks and performs exactly as it should for decades to come. From traditional to innovative installation systems, economic and ecological cleaning systems and accessories for your floor's finishing details, our range of options makes it easy to realize and preserve the value of your nora rubber floorcoverings.

Quick installation systems



nora nTx is a unique technology for professional installation of nora rubber floor coverings. Ingeniously simple - nora nTx floor coverings brings adhesive strength along from the factory.

The flooring is cleanly and safely installed in a few steps then immediately ready for use. Install over concrete or cement substrates typical in new construction or over existing floor coverings during renovations. Even high residual moisture in the substrate is no problem for nora nTx.

nora also offers a range of tools and installation material to ensure clean and safe substrate preparation.




nora nTx includes a range of standard noraplan sheet and norament tile floor coverings that come equipped with a self-adhesive layer. The glue in the adhesive layer is protected with film until installation and—like our floor coverings—is rubber-based and particularly health-friendly. Specially developed installation materials and tools for nora nTx provide functional safety and ensure the highest quality standards.

- nora nTx standard color
- available as nora nTx with minimum order quantity

nora nTx system configuration

1 Substrate 2 nora® nTx™ 020 (bond enhancer) 3 nora nTx floor covering with self-adhesive back

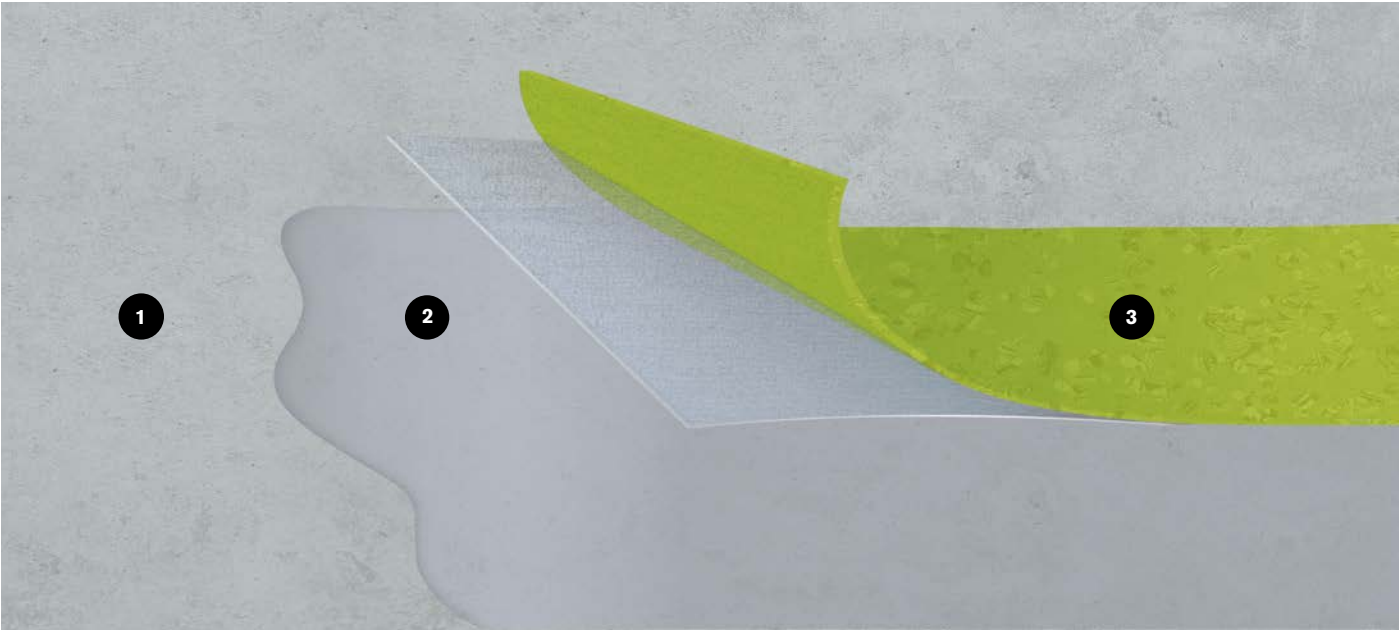

The advantages at a glance



Reliable installation result
nora nTx reduces installation problems and is backed by our 10-year bond warranty*.




Immediate usability
Avoid drying and waiting times. Installation is possible during ongoing operations, and the floor can be used immediately after installation.



High efficiency
The preparation of the floor and the installation of nora nTx require only few work steps – for more space in less time.



For all types of substrates
nora nTx is suitable for all common-types of substrates—ideal also for problematic substrates and underfloor heating.




Use with residual moisture
Application in new buildings is possible even with increased residual moisture in the substrate.



Covering-over-covering installation
In the case of renovations, installation is possible directly over existing floor coverings in just a few steps.

*Under the criteria detailed in our nora nTx Warranty - Americas at www.nora.com

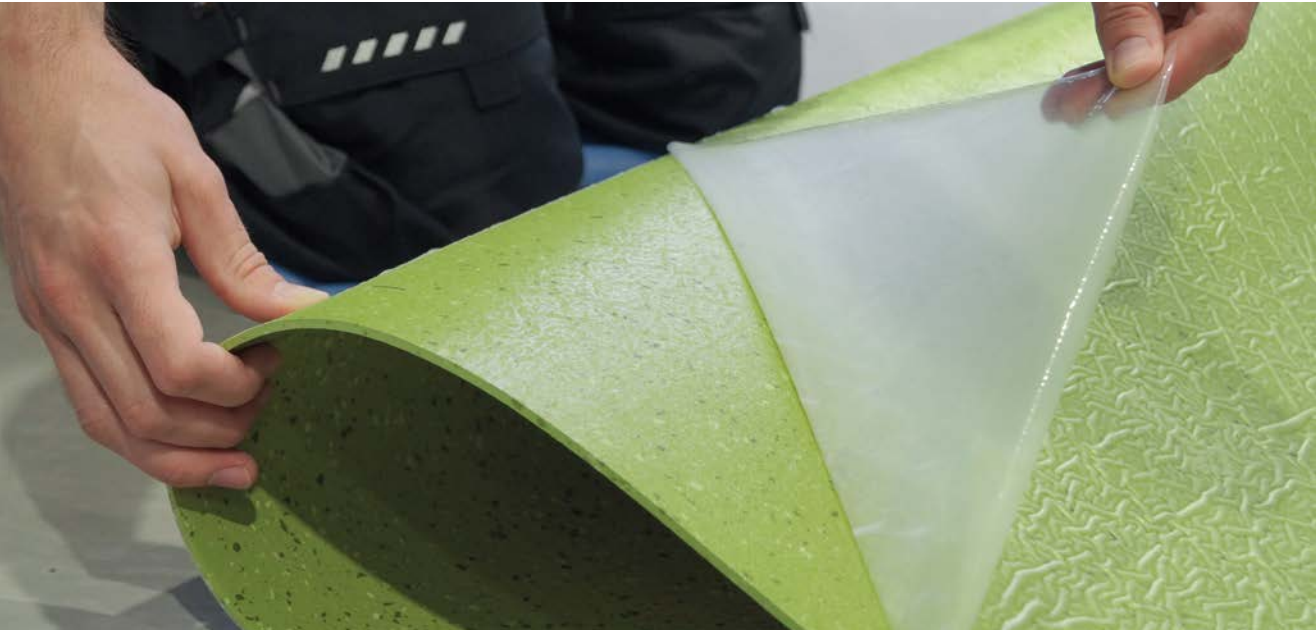

norament® nTx™

norament arago nTx
Art. 3122 ~3.5 mm
□ ~1004 mm x 502 mm (~39.53 in x 19.76 in)

These tiles can also be supplied with beveled edges.

norament castello nTx
Art. 3177 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)

norament xp nTx
Art. 3111 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)

norament xp trac nTx
Art. 3134 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)

norament grano nTx
Art. 3111 ~3.5 mm
□ ~1004 mm x 1004 mm (~39.53 in x 39.53 in)

Please call for lead times


norament⁺ arago™ nTx™ relief structure surface




5171
Fortitude



5172
Stamina



5175
Unity



5177
Balance




5178
Calm


norament castello™ nTx™ two-tone surface




5354
Manor



5355
Palazzo




5356
Domus




5357
Palais


norament® xp™ nTx™ hammered surface



5306
Camphor



5310
Helichrysum



5319
Spikenard




5330
Cassia


norament® xp trac™ nTx™ grain structure surface



5303
Frankincense



5306
Camphor



5319
Spikenard




5330
Cassia




ANNE-FRANK SCHOOL RASTATT, DE

PRODUCT NORAMENT GRANO NTX COLOR 5303 FRANKINCENSE


norament® grano™ nTx™ hammered surface




5301
White Fir




5302
Angelica Root




5303
Frankincense



5304
Black Pepper




5305
Agar




5306
Camphor




5307
Fenugreek



5308
Myrrh



5315
Cedarwood



5318
Blue Tansy



5319
Spikenard




5320
Sassafras



5325
Balsam



5329
Bergamot



5331
Neroli



5332
Geranium

noraplan® nTx™

noraplan environcare nTx
Art. 181C ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)

noraplan environcare nTx
Art. 187C ~3 mm
~12 m x 1.22 m (~39.37 ft x 48 in)

Please call for lead times


noraplan **environcare™ nTx™ 2 mm** smooth surface



7031
Baseball Game



7033
Tail Gating



7036
Clam Bake



7051
Snowball Fight



7055
Champagne Toast

noraplan **environcare™ nTx™ 3 mm** smooth surface



7033
Tail Gating



7051
Snowball Fight




7055
Champagne Toast



7056
Antiquing



7061
Farmers Market



7065
Pool Party



7073
Apple Picking

noraplan® **sentica™ nTx™ 2 mm** smooth surface

noraplan sentica nTx
Art. 182C ~2 mm
~15 m x 1.22 m (~49.21 ft x 48 in)

noraplan sentica nTx
Art. 186C ~3 mm
~12 m x 1.22 m (~39.37 ft x 48 in)

Please call for lead times



6505
Silk



6506
Cashmere



6520
Snow Day



6522
Expedition



6529
Surf

noraplan® **sentica™ nTx™ 3 mm** smooth surface



6505
Silk



6506
Cashmere



6520
Snow Day



nora® nTx™ Installation material

nora nTx 020 has been developed specifically for the nora nTx floor coverings. The perfect matching between the bond enhancer and the nora nTx floor coverings provides functional reliability and ensures the highest standards of quality. Moreover, nora nTx 020 can be applied to substrates with higher residual moisture levels.




nora® nTx™ 020
Bond enhancer

nora nTx 020 is a 1-component Polyurethane resin bond enhancer for use with the nora nTx system on absorptive and non-absorptive substrates.

- Ready to use
- Fast drying
- Alkali resistant
- Solvent free
- Ready for installation in about 1 hour
- Superior bonding to a wide range of substrates

Art. 6684
Bond enhancer for improved adhesion
2.6 gallon bottle

nora® nTx tools

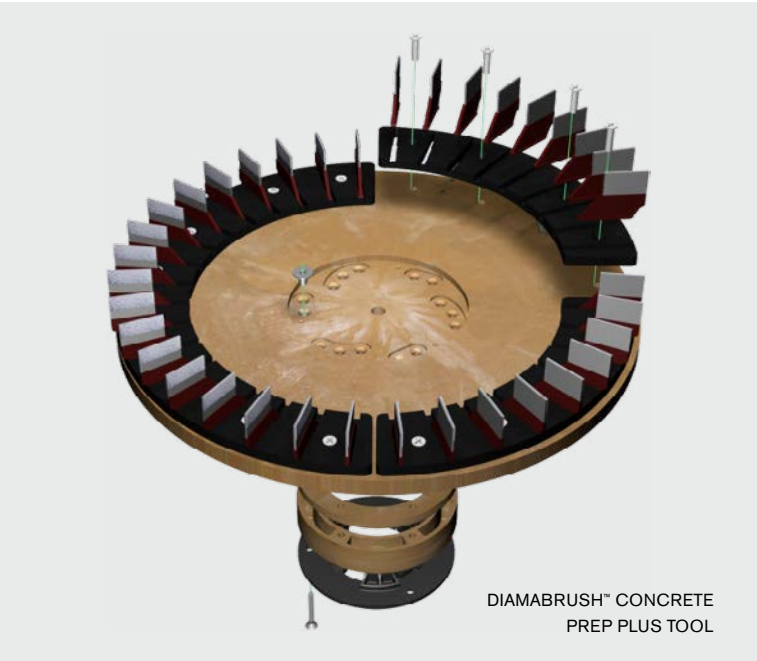

Diamabrush™ Concrete Prep Plus Tool
Sanding disc for preparing substrates

Art. 6502
Material # 502521 — 20 inch
Suitable sanding discs for the machines:
Mambo, Columbus, and Orkan.
NOTE: Please specify the machine type in your order



Dust Skirt
Material # 502526 — 20 inch

nora **dryfix™ 750**

nora dryfix 750 provides a quick, easy, and reliable alternative to conventional flooring adhesives. There is no mixing or adhesive clean-up necessary, and nora dryfix 750 allows for immediate traffic post-installation.

- Odorless
- Recommended for operating rooms
- Excellent for heavy traffic
- No necessary open time required
- Non-flammable and freeze/thaw stable
- Free of organic solvents, formaldehyde, asbestos, lindane, rosins, phthalates, benzoates, adipates, or any other volatile components
- GREENGUARD Gold certified for low VOC emissions
- In compliance with South Coast (CA) Air Quality Management District Rule 1168

Art. 6556
75 cm wide x 30 m long (~29.5 in x 98.5 ft)

nora **dryfix™ ed**

Conductive dry adhesive tape

nora dryfix ed provides a quick, easy, and reliable alternative to conventional conductive flooring adhesives. There is no mixing or adhesive clean-up necessary, and nora dryfix ed allows for immediate traffic post-installation.

- Odorless
- Excellent for heavy traffic
- Immediate use conductive adhesive
- Non-flammable and freeze/thaw stable
- Free of organic solvents, formaldehyde, asbestos, lindane, rosins, phthalates, or any other volatile components
- GREENGUARD Gold certified for low VOC emissions
- In compliance with South Coast (CA) Air Quality Management District Rule 1168

Art. 6706
75 cm wide x 30 m long (~29.5 in x 98.5 ft)



nora[®] **profix™**

nora profix tape is supplied in rolls for installation of nora sanitary base and flash coving. nora profix provides the following benefits:

- Odorless
- No necessary open time required
- Non-flammable and freeze/thaw stable
- Free of solvents, formaldehyde, asbestos, lindane, chlorinated biphenyls, pentachlorophenol, phthalates or other toxic substances
- GREENGUARD Gold certified for low VOC emissions
- In compliance with South Coast (CA) Air Quality Management District Rule 1168

profix™ 145 Art. 6650
145 cm wide x 50 m long (~5.71 in x 164 ft)
profix™ 90 Art. 993
90 cm wide x 50 m long (~3.54 in x 164 ft)
profix™ 50 Art. 992
50 cm wide x 50 m long (~1.97 in x 164 ft)

When using dry tape adhesives, substrate must be dry at time of installation.




nora[®] AC MR95™

Moisture-resistant acrylic adhesive

Easy-to-use, solvent free, water based acrylic adhesive able to resist high concrete relative humidity levels that has been specifically formulated for the installation of nora rubber floor coverings (2 mm – 4 mm).

- 95% humidity resistant
- High-bond strength
- Excellent for heavy traffic
- Non-flammable and freeze/thaw stable
- Free of organic solvents, formaldehyde, asbestos, lindane, rosins, phthalates or any other volatile components
- GREENGUARD Gold certified for low VOC emissions
- In compliance with South Coast (CA) Air Quality Management District Rule 1168

Art. 6694
4 gallon pail

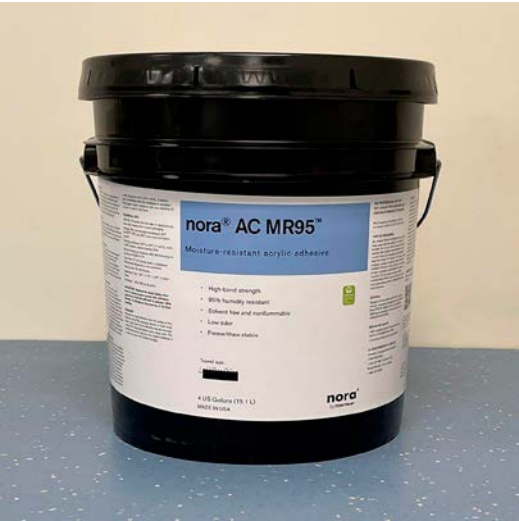

nora[®] PU MR95™

Moisture-resistant polyurethane adhesive

Two-component urethane adhesive designed specifically for the installation of specific nora rubber floor coverings on suitable substrates. When parts A & B are thoroughly mixed together, they form a reactive adhesive that cures to a tough, flexible film with a good resistance to surface moisture and many chemicals.

- 95% humidity resistant
- High-bond strength
- Non-flammable and freeze/thaw stable
- Free of organic solvents, formaldehyde, asbestos, lindane, rosins, phthalates or any other volatile components
- GREENGUARD Gold certified for low VOC emissions
- In compliance with South Coast (CA) Air Quality Management District Rule 1168

Art. 6696
1.5 gallon unit within a 2 gallon pail (Part A & B)




nora[®] ED MR90™

Moisture-resistant conductive adhesive

Easy-to-use, wet set, conductive, water based acrylic adhesive that has been specifically formulated for the installation of nora ed rubber floor coverings (2 mm – 4 mm) on absorptive substrates.

- 90% humidity resistant
- High-bond strength
- Excellent for heavy traffic
- Non-flammable and freeze/thaw stable
- Free of organic solvents, formaldehyde, asbestos, lindane, rosins, plasticizers or any other volatile components
- In compliance with South Coast (CA) Air Quality Management District Rule 1168

Art. 6695
4 gallon pail

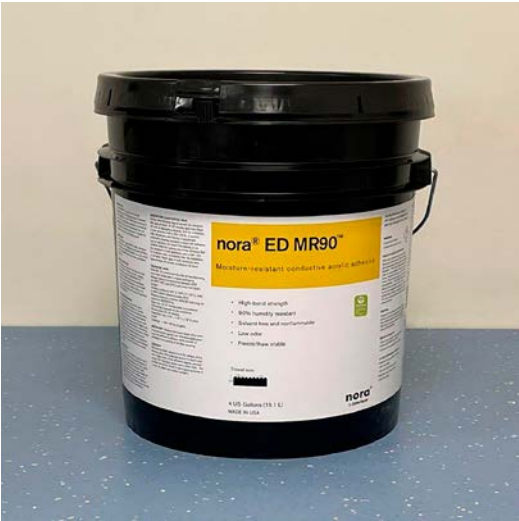

Accessory range made of rubber to suit nora floor coverings for convincing solutions both in visual and functional terms. The materials are impact- and shock-resistant, do not contain any phthalate plasticizers and retain their functional reliability long term.

nora® sanitary base


Easy to clean, suitable for areas with stringent hygienic requirements.



Art. 817 — S 3019 D
Piece Length: 10 m (~32.81 ft)

*Conforms to ASTM-F-1861 — Standard Specification for Resilient Wall Base, Type TP: Thermoplastic Rubber, Group 1

2409	5111	6504	7036
2780	5303	6505	7040
2787	5304	6506	7041
2930	5306	6509	7046
2944	5309	6524	7049
2945	5310	6528	7052
2963	5319	7035	7062

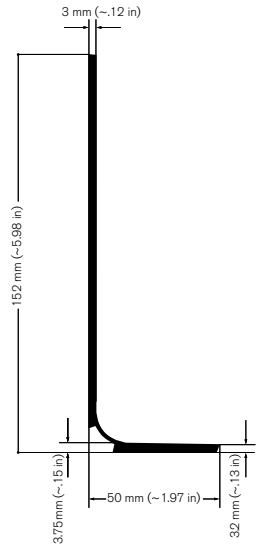

For floor covering thicknesses from 3 to 3.5mm (~.12 in to .14 in)

nora® wall base

nora wall base provides superb flexibility, no color drifts, a ribbed backing and reinforced cove for extraordinary durability.



Art. 820
Delivery unit: rolls of 120 ft

nora wall base is intended to complement our floor coverings and will not match exact color due to variation in product recipes and production batches. Please do not specify or order solely using color names as a guide to color, as names are often shared across multiple products. We recommend ordering samples of each product prior to selection for the best results. Custom color matching is available.

6267	6233	6211	6254
6232	6205	6201	6240
6246	6286	6235	6214
6298	6266	6202	6248
6204	6229	6294	6249



nora® cold weld

It is recommended to weld joints in rooms permanently undergoing intensive wet cleaning or in areas with special hygienic requirements. For these special applications, welding of all norament and noraplan rubber flooring is recommended, with the exception of norament 992/992 grano.

Art. 928
300 ml (10 fl oz)
~50-60 LF per tube

Joint cutters, spatulas and cold weld tape available for order.

Custom colors available on request. Minimum order quantities required. Contact your sales representative.

0007	2786	5121	5315	5366	6517	6715	7052	7078
0131	2787	5122	5317	5367	6518	6716	7053	7101
0319	2897	5123	5318	5368	6519	6720	7054	7102
0702	2931	5127	5319	5508	6520	6721	7055	7103
0716	2932	5128	5321	5509	6521	6722	7056	7104
0733	2940	5130	5324	5512	6522	7031	7057	7105
0749	2944	5189	5325	5513	6523	7032	7058	7106
0882	2946	5270	5329	6325	6524	7033	7059	7107
0884	2951	5271	5332	6449	6525	7034	7060	7108
1253	2962	5272	5336	6500	6526	7035	7061	7109
1254	4877	5273	5337	6501	6527	7036	7062	7110
1279	4881	5274	5342	6502	6528	7037	7063	7111
1385	5102	5275	5343	6503	6529	7038	7064	7112
1578	5103	5276	5351	6504	6530	7039	7065	7113
1581	5104	5301	5352	6505	6531	7040	7066	7114
1582	5105	5302	5353	6506	6532	7041	7067	7115
1585	5106	5303	5354	6507	6533	7042	7068	7116
2070	5107	5304	5355	6508	6534	7043	7069	7117
2142	5109	5305	5356	6509	6535	7044	7070	7118
2226	5110	5306	5357	6510	6536	7045	7071	7119
2382	5111	5307	5358	6511	6537	7046	7072	7120
2454	5113	5308	5361	6512	6603	7047	7073	7171
2457	5114	5310	5362	6513	6708	7048	7074	7175
2666	5115	5311	5363	6514	6709	7049	7075	7176
2681	5116	5313	5364	6515	6713	7050	7076	
2781	5119	5314	5365	6516	6714	7051	7077	

nora® heat weld



Matching welding rod can be delivered for all noraplan colors.

noraplan floors do not need to be welded, with the exception of noraplan acoustic, which requires welding due to its resilient structure.

nora heat welding is recommended when the nora flooring has been installed in rooms with continual and intensive wet cleaning, in areas with stringent requirements for hygiene or other special requirements such as operating rooms and laboratories.

Art. 946
Round, 4 mm (~.16 in)
Rolls of 100 LM (~328 LF)
Weight per roll 1.3 kg (~3 lbs)

nora **pro clean™** system

A scrubber, nora® Pads and water is all you need.

The nora pro clean system eliminates the need to use harsh, unfriendly cleaning detergents on your nora® rubber flooring. The combination of nora's unique, dense, non-porous and dirt-repellent surface, water and our exclusive nora Pads provides a more cost-effective and sustainable cleaning solution. The continuous use of this system will make your nora flooring more resistant to scuffs and staining over time.



The key to the nora pro clean system is the nora Pads. For use only on nora rubber flooring, these exclusive pads are designed for all levels of maintenance needs, from the periodic cleaning of small spaces to the more intense post-installation or initial maintenance cleaning.

nora Pads will take you from post-installation maintenance, enhanced shine, daily maintenance, and periodic maintenance through your toughest cleaning challenges.

nora® **Pads**

nora pro clean pads are designed for post-installation, daily, periodic maintenance and enhanced shine on select nora rubber floor coverings. nora pro clean pads can be used with most standard types of cleaning equipment such as floor scrubbers and automatic floor scrubbers that are available in different sizes with 4 pads to a box.

nora Pad 0 is used for post installation (depending on amount of soil), daily and periodic maintenance and enhanced shine on select nora floor coverings.

	Art. 6502
nora Pad 0 — 20 in	Material # 502355
nora Pad 0 — 17 in	Material # 502354
nora Pad 0 — 16 in	Material # 502353
nora Pad 0 — 14 in	Material # 502352
nora Pad 0 — 13 in	Material # 502351
nora Pad 0 — 12 in	Material # 502350

nora pad 2 is used for intensive cleaning (depending on amount of soil), and minor scratch repair (restoration) on select nora floor coverings. When using nora pad 2, you must follow up with enhanced shine protocol.

	Art. 6502
nora Pad 2 — 20 in	Material # 501701
nora Pad 2 — 17 in	Material # 501705
nora Pad 2 — 14 in	Material # 501708
nora Pad 2 — 13 in	Material # 501710

nora pad 1 is used for periodic maintenance (depending on amount of soil) and enhanced shine on select nora floor coverings.

	Art. 6502
nora Pad 1 — 20 in	Material # 501700
nora Pad 1 — 17 in	Material # 501704
nora Pad 1 — 16 in	Material # 502090
nora Pad 1 — 14 in	Material # 501707
nora Pad 1 — 13 in	Material # 501709
nora Pad 1 — 12 in	Material # 502089

nora pad 3 is used for intensive cleaning and minor scratch repair (restoration) on select nora floor coverings. When using nora pad 3, you must follow up with enhanced shine protocol.

	Art. 6502
nora Pad 3 — 20 in	Material # 501702
nora Pad 3 — 17 in	Material # 501706

Contact your nora Maintenance Specialist for instructions, including product suitability and usage.

nora® **pro steamer™**

Your occupied spaces, deep cleaned with steam.

The quiet, non-disruptive cleaning power of steam gives you the ability to deep clean smaller spaces and hard to reach areas while still supporting a calming healing environment. Using only distilled water to create superheated dry steam – your patients will breathe easy and enjoy an improved experience in their clean surroundings.

nora pro steamer	Art. 6690
nora pro steamer Bottle	Art. 6692
nora pro steamer Pad	Art. 502541



nora 4you

nora 4you provides customized solutions for your individual flooring needs.

NOTTING HILL PREPARATORY SCHOOL, LONDON, UK
© HANSON ARCHITECTS | DAVIDE SAIBENE

Flooring gives your rooms structure, personality and life. With nora 4you, you can design your rooms exactly as you want them. We offer customized solutions that make your rooms special and distinctive in a way that is important to you. Almost anything is possible.


Quality and functionality are crucial criteria when selecting floor coverings. With nora 4you, we go one step further and put an additional focus on design and individuality. This allows you to creatively design, structure or accentuate your surfaces with colors, tile designs and inlays according to your specific requirements and ideas.

Inlays

Create inlays based on our templates or design compositions of your own imagination. At our inlay center we can process your images, drawings or image files to create your own design. Our state-of-the-art ultrasonic cutting machine cuts almost any motif into 100% matching pieces that can be laid without welding the joints. To guarantee easy installation, we supply inlays up to a size of 1.6 x 1.22 meters, fully assembled and ready for installation. For large-sized inlays, we provide the floor layer with detailed installation instructions.

Room Inlays


Room inlays are design elements. Depending on the color combination, design language and combination of materials, they change and shape the room. Whether used as part of a comprehensive design concept or as a decorative eye-catcher, inlays make a statement that can't be overlooked. They help give spaces a distinctive identity.

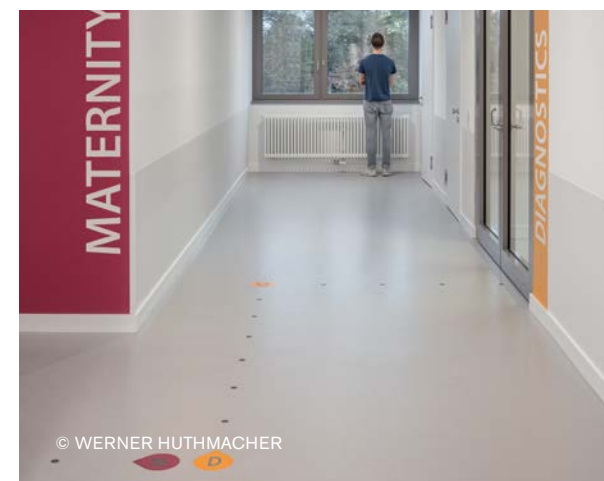

Routing systems

With nora 4you, you can adapt your wayfinding system to your individual space. For example, color-coded stripes or signs in the floor help people to orientate themselves as they move through different sections or parts of the building.

In addition, nora offers a variety of inlay options for flooring to mark escape routes with integrated photoluminescent strips or other photoluminescent elements.

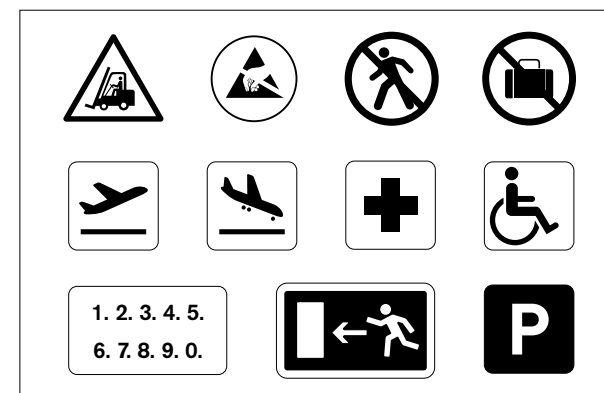

**Choose from our standard
symbols or design your own**

nora offers you a wide range of standardised templates, which we can customise according to your requirements. In addition to our standard symbols, we will be happy to design and create individual symbols or logos to suit your specific requirements.



Planks and Tiles

Our plank and tile concept gives you almost limitless freedom to design your rooms the way you want. You can use any combination of plank or tile shapes and colors to influence the overall design of the room. The installation pattern also has a decisive influence on the sense of space. Planks enable you to create a distinctive and individual spatial effect in variants that are precisely tailored to your needs. Even with tiles, you can realize different installation patterns or set unusual accents.

Our plank formats are available with most noraplan designs. We deliver planks in your choice of color and in five standard sizes options in 2 mm or 3 mm. In addition, with monochrome installations of planks or tiles, the edges can be beveled to enhance the tiled, individual look while being easy to clean and maintain. Welding is not required, allowing for ease of installation while providing a hygienic seal. Talk to us about your ideas and we will be happy to support you with individual planning.

Different formats for endless possibilities and individual room design.

noraplan



610 mm x 305 mm
(~24.015 in x 12 in)



610 mm x 205 mm
(~24.015 in x 8.07 in)



610 mm x 152.5 mm
(~24.015 in x 6 in)




1220 mm x 405 mm
(~48.03 in x 15.94 in)



1220 mm x 202.5 mm
(~48.03 in x 7.97 in)

norament



1004 mm x 1004 mm
(~39.53 in x 39.53 in)

norament arago



1004 mm x 502 mm
(~39.53 in x 19.76 in)

Further plank and tile sizes are available on request.
Please ask for minimum quantities.



MERIDIAAN COLLEGE, AMERSFOORT, NL
© STUDIO BEELDWERKEN

PRODUCT NORAMENT ARAGO

Custom colors

With over 300 colors and shades, even our standard product program provides outstanding choice. However, if you are looking for a different color, we will be happy to develop an individual color for your project. We can customize almost any color using samples or color codes (NCS, RAL, Pantone) and implement your wishes in the flooring. For example, you can design your entire building in one shade without compromising the functional properties of your flooring.

You can choose from different:

- base colors
- granules
- surface profiles

Please ask for minimum order quantities and delivery times.



MACQUARIE BANK, SYDNEY, AUSTRALIA
© JESSE TAYLOR

nora® by Interface®

Limited Warranty – Americas

nora systems, Inc. (nora) warrants the following nora® brand products (collectively, the “Warranted nora Brand Flooring Products”) as set forth below: norament® and noraplan® rubber flooring, norament® rubber stairtread (excluding visually impaired strips), accessories (excluding visually impaired strips), nora® nTx™ 020 bond enhancer and adhesives, and the conductivity of its Electrostatic Dissipative (“ESD”) flooring system (norament® ed and noraplan® ed flooring and adhesive).

nora Brand Flooring Products

- The Warranted nora Brand Flooring Products listed in the table below are warranted to the original end-use customer, for the period of time indicated in the table below, against blemishes and excessive wear due to normal traffic, provided the material was installed and maintained properly and strictly in accordance with the applicable nora Installation Instructions and Maintenance Guidelines, which can be found on the nora.com website and used as intended and recommended. For these purposes, “excessive wear” is defined as wear in excess of the following measurements: norament® products and norament® stairtreads, 0.0375” total; noraplan® products, 0.0525” total. All warranty claims must be made by the customer before the end of the time period stated in chart below; and
- The conductivity of ESD flooring system products are warranted to the original end-use customer for a period of 10 years from the date of invoice, provided the material was installed with nora’s conductive adhesive (acrylic or polyurethane), when tested according to the test procedures of ESD S7.1-94 and ASTM-F-150 under >30% relative humidity at room temperature to measure between 10⁶ and 10⁹ OHMS. All warranty claims must be made by the customer within the established 10-year period; and
- Installations of all Warranted nora Brand Flooring Products must be completed strictly in accordance with the applicable nora Installation Instructions, which can be found on the nora.com website. In all installations, there must be no visible moisture on the surface of the concrete slab. Written and photographic evidence showing moisture and mat bond test results must be maintained by the original end-use customer.

Product	Blemish and Excessive wear warranty period (years from date of invoice)
nora® stair nosing, wall base, sanitary base	5
noraplan® / noraplan nTx™; linee™, lona™	5
norament® stairtreads (exclusive of the visually impaired strips)	15
norament, norament nTx™, norament ed	15
noraplan, noraplan nTx™, noraplan acoustic, noraplan ed	15

If nora determines that a product is covered by this limited warranty, nora will correct the problem in the affected area by either repair or replacement with comparable product(s), at nora’s option, at no charge to the customer.

nora also warrants the Warranted nora Brand Flooring Products to the original end-use customer against defects arising out of the manufacturing process as stated below:

- If the product is determined to exhibit a manufacturing defect and the customer has made a warranty claim to nora within the first year following the date of invoice, nora will correct the problem in the affected area either (at nora’s option) by repair or replacement with comparable product(s) at no charge to the customer, as well as pay the reasonable labor costs (as determined by nora) associated with its repair or replacement;
- If the product is determined to exhibit a manufacturing defect and the customer has made a warranty claim to nora in the second year following the date of invoice, nora will correct the problem in the affected area either (at nora’s option) by repair or replacement with comparable product(s) at no charge to the customer, as well as pay fifty percent (50%) of the reasonable labor costs (as determined by nora) associated with its repair or replacement; and
- If the product is determined to exhibit a manufacturing defect and the customer has made a warranty claim to nora in the third, fourth, or fifth years following the date of invoice, nora will correct the problem in the affected area either (at nora’s option) by repair or replacement with comparable product(s) at no charge to the customer but will not be responsible for any labor costs associated with its repair or replacement.

nora Adhesive Products

As stated below, nora warrants to the original end-use customer that the following adhesives are free of manufacturing defects: nora® AC 100™, ED 120™, PU 102™, AC MR95™, ED MR90™, and PU MR95™, stepfix 240™, profix™, and nora dryfix™ 750, and nora dryfix™ ed and nora dryfix™ mr.

If the adhesive is determined to exhibit a manufacturing defect and the customer has made a warranty claim to nora within the first year following the date of invoice, nora will correct the problem in the affected area either (at nora’s option) by repair or replacement with comparable product(s) at no charge to the customer, as well as pay the reasonable labor costs (as determined by nora) associated with its repair or replacement.

nora dryfix mr Bond Warranty

nora hereby represents and warrants for a period of the ten (10) years as from the date of invoice that nora dryfix mr shall not delaminate due to slab relative humidity of less than 99% when tested in accordance with ASTM F2170 “Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes” provided that the installation is compliant with ASTM F710, the nora installation instructions, that storage of the material prior to installation is in accordance with the product data sheet and shelf-life of the material is not expired at time of installation.

nora Warranty Limitations

In all cases in which a covered warranty condition is determined by nora to exist, the customer must provide reasonable cooperation to facilitate nora’s repair or replacement in the affected area. This warranty shall apply to standard Americas (AMS) nora brand flooring products; products sold in Europe, Africa, Asia and Australia (EAAA) shall be covered under the EAAA nora brand products warranty. Please contact your local representative with any inquiries.

This warranty does not cover cuts, loss of gloss, burns, scratches, indentations, stains or other damage, deterioration, problems, or loss caused by abuse, neglect, misuse, improper installation, improper maintenance, flood, or subfloor irregularities. This warranty does not cover fading or discoloration from prolonged, excessive exposure to sunlight or heat. Moisture testing, when applicable, at the installation site is not the responsibility of nora, and issues, problems or damage related to or arising from excessive moisture are specifically excluded from this warranty except as expressly set forth herein and in the applicable nora Installation Instructions and Maintenance Guidelines. This warranty does not cover any issues, problems or damages arising from or related to installation techniques or conditions not strictly meeting the requirements in the applicable Installation Instructions.

nora does not warrant installer’s workmanship unless the affected product was installed by nora affiliate Interface Services, Inc., (Interface Services), and then only in accordance with the terms of the Interface Services installation warranty.

Warranty claims must be made in writing to nora within the time frames indicated herein. Warranty claims must be addressed to: nora systems, Inc., Technical Operations Department, 9 Northeastern Blvd., Salem, NH 03079. Warranty claims must include contemporaneous documentation that all warranty conditions were and continue to be met. This warranty will be void if its terms are not followed. The customer must inspect all products, prior to installation, for patent defects and notify nora thereof, prior to installation; otherwise, this warranty will be void. No person other than an officer of nora may authorize a waiver or modification of the terms of this warranty, which must be in writing and signed by that officer.

This limited warranty and the applicable Installation Instructions and Maintenance Guidelines are subject to change at nora’s discretion and without notice. Please contact nora or visit the nora.com website for the latest versions. For additional information regarding usage in recommended applications, please refer to www.nora.com or call 1-800-332-NORA. Warranty periods commence on the date of invoice ofthe product to the original end-use customer.

The warranties herein are only made to the original end-use customer and no other parties. The remedies stated herein are the sole and exclusive remedies of the original end-use customer and the sole and exclusive liability of nora and its affiliates.

THE WARRANTY, REMEDY AND LIMITS OF LIABILITY CONTAINED HEREIN ARE EXPRESSLY IN LIEU OF AND EXCLUDE ALL OTHER WARRANTIES, REMEDIES AND LIABILITIES, WHETHER EXPRESS OR IMPLIED. NORA MAKES NO OTHER REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, AND HEREBY DISCLAIMS ANY AND ALL OTHER WARRANTIES THAT MAY ARISE BY OPERATION OF LAW, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS OF ITS PRODUCTS FOR ANY PARTICULAR PURPOSES. NOTE THAT SOME JURISDICTIONS DO NOT PERMIT DISCLAIMERS OF SOME IMPLIED WARRANTIES, SO YOUR RIGHTS MAY BE DIFFERENT THAN STATED HEREIN. IN NO EVENT WILL NORA BE LIABLE FOR ANY INCIDENTAL, INDIRECT, SPECIAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES OR LOSS OF USE, LOSS OF BUSINESS, LOST PROFITS OR REVENUES OR DIMINUTION IN VALUE REGARDLESS OF (A) WHETHER SUCH DAMAGES WERE FORESEEABLE, (B) WHETHER NORA OR ITS AFFILIATES WERE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR (C) THE LEGAL OR EQUITABLE THEORY (CONTRACT, TORT OR OTHERWISE) UPON WHICH THE CLAIM IS BASED, AND NOTWITHSTANDING THE FAILURE OF ANY AGREED OR OTHER REMEDY OF ITS ESSENTIAL PURPOSE.

nora®, norament®, and noraplan® are trademarks owned by nora systems GmbH and registered in the United States, Canada, and other countries. All other trademarks are the property of their respective owners.

Supersedes all previous information. Effective October 5, 2023.

nora[®] by Interface[®]
nora[®] nTx Warranty – Americas

Warranty Coverage

nora systems, Inc. (“nora”), warrants nora[®] nTx when used in conjunction with nora[®] nTx 020), including the bond and resistance to moisture and/or high alkalinity for a period of (10) ten years from the date of purchase by the buyer and/or end user, whichever is first, provided all nora nTx and nora nTx storage, preparation, installation and usage directions are followed.

nora will repair or replace defective areas of the nora nTx and pay the reasonable labor and material costs to remove, repair or replace the defective areas of the nora nTx, provided the buyer or end user complies with the terms of this limited warranty. nora nTx must be applied in strict accordance with nora’s written nora[®] nTx Installation Guide. Please contact nora systems, Inc. for the current version or go to www.nora.com/us website, as it is subject to change.

EXCEPT FOR THE LIMITED WARRANTIES SET FORTH HEREIN, NORA EXTENDS NO OTHER WARRANTIES OR GUARANTEES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR EXACT MATCHING OF SHADE, COLOR OR MOTTLING. NORA HEREBY DISCLAIMS ANY OTHER WARRANTY OR GUARANTEE UNLESS EXPRESSLY AUTHORIZED AND ENDORSED IN WRITING AS SET FORTH BELOW.

No agent, employee or representative of nora is authorized to make any warranty or guarantee concerning the products. Any alteration, amendment or waiver of this nora nTx limited warranty must be in writing and signed by an officer of nora.

Exclusions from Warranty Coverage

nora hereby disclaims any warranty coverage arising from the following; concrete slabs that have ASR (Alkali Silica Reaction) present, hydrostatic pressure, structural failure, inadequate sub-floor, or improper sub-floor preparation including failure to remove any bond breaking contaminants; damages caused by Acts of God, including, but not limited to hurricane, flooding, earthquake or other types of natural disaster, or as a result of unforeseen circumstances; acts of negligence, or product misuse or abuse, damage by a third party; failure to comply with our nora nTx Installation Guide and any other written instructions, applicable building codes and regulations, and other standard industry practices; variations of color, shade or texture from those shown on samples, product packaging or any other marketing materials; any changes due to exposure to sunlight and age; normal wear and tear resulting from usage; efflorescence and shading inherent in all cementitious products; and cracking due to structural movement after application, excessive deflection or other failure of the substrate.

Notice of Claims

To make a claim under any warranty, the buyer or end user must provide written notice to nora systems, Inc. at 9 Northeastern Blvd., Salem, NH 03079, within 30 days of discovery of any alleged defect of the product. nora must be given the opportunity to inspect and examine the product prior to buyer or end user repairing or replacing the defective product.

Limitation of Liability; Indemnity

nora will not be directly or indirectly liable for any other losses, claims or damages in excess of the cost of the products invoiced by nora and reasonable labor costs. nora shall not be liable for any consequential, incidental, enhanced or punitive damages whatsoever, whether arising out of breach of contract, warranty, tort, (including negligence and strict liability) or other theories of law with respect to goods and/or services sold by nora or any undertakings, acts, or omissions relating thereto, and nora hereby disclaims all such damages. Buyer shall indemnify nora against any and all losses, liabilities, damages and expenses (including, without limitation, attorneys’ fees and other costs of defense) which nora may incur as a result of any claim by buyer or others arising out of or in connection with the goods and/or services sold hereunder and based on product or service defects not proven to have been caused solely by nora’s negligence.

Governing Law; Venue

The rights and obligations of the parties hereto and the interpretation, construction and effect of any provision hereof or any contract formed pursuant hereto shall be governed by and construed in accordance with the laws of the state of New Hampshire, without reference to its conflict of law rules.

Supersedes all previous information. Effective February 2020.

nora[®] by Interface[®]
nora[®] pro steamer Warranty – Americas

Limited Product Warranty

nora systems, Inc. (“nora”), warrants its nora[®] pro steamer (the “Product”) to the original purchaser (the “Purchaser”) to be free from defects in material or workmanship for a period of one (1) year from the date of purchase from nora when used in accordance with nora’s Instruction Guide. If (i) nora is notified within the limited warranty period of any such defect as specified below and if (ii) the Purchaser has used the Product under normal use and in strict conformity with the Instruction Guide provided by nora, then nora, at its sole discretion, will use commercially reasonable efforts to repair or replace that portion of the Product found by nora to be defective in material or workmanship at no cost to the Purchaser (except for shipping and transportation costs associated with returning the Product to nora) or refund the purchase price of the Product or replace the Product or a portion of same if Product is returned to nora, freight and postage costs must be prepaid by the Purchaser. Repairs not covered by the warranty or outside the warranty period will require a fee determined by nora to cover the cost of repairs, labor, handling and shipping.

This warranty does not apply to defects, damage or loss caused in whole or in part by (i) abuse, modification, alteration, misuse or tampering of the Product, (ii) failure to strictly comply with nora’s Instruction Guide, (iii) use on any surface other than nora rubber flooring, (iv) lack of proper maintenance or (v) normal wear and tear. Repair or service of the Product by anyone other than nora systems, Inc. or its authorized representatives shall void this warranty.

EXCEPT FOR THE LIMITED WARRANTIES SET FORTH HEREIN, NORA EXTENDS NO OTHER WARRANTIES OR GUARANTEES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. REPAIR OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE EXCLUSIVE REMEDY OF THE CONSUMER OR PURCHASER. NORA SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THIS PRODUCT. NORA HEREBY DISCLAIMS ANY OTHER WARRANTY OR GUARANTEE UNLESS EXPRESSLY AUTHORIZED AND ENDORSED IN WRITING AS SET FORTH BELOW.

nora’s maximum liability whether in tort, contract, or otherwise shall be the cost of the Product invoiced by nora.

No agent, employee or representative of nora is authorized to make any warranty or guarantee concerning the Product. Any alteration, amendment or waiver of this One-Year Limited Warranty must be in writing and signed by an officer of nora.

Limitation of Liability

nora shall not be directly or indirectly liable for any losses, claims or damages in connection with any use of nora pro steamer(s) that does not strictly comply with nora’s Instruction Guide, that was directly or indirectly caused by a third party, that was improperly repaired, or that was affected by any other mechanical influences. Please contact nora for the latest warranty versions. For additional information, please call 1-800-332-NORA.

It is understood that certain parts of the Product are not covered by this One-Year Limited Warranty due to the fact that they require replacement after multiple use. Such parts will eventually require replacement at the Purchaser’s cost and are explicitly excluded from this warranty.

nora shall not be liable for any losses, claims, or damages in excess of the cost of the Product invoiced by nora. nora shall not be liable for any incidental, consequential, enhanced or punitive damages.

Warranty for other conditions supplied upon request.

This warranty is to solely benefit the original purchaser of the Product. The warranty is not transferable beyond the original purchaser.

nora makes no warranty or representation that the Product complies with any local laws, rules or regulations and the original purchaser shall be responsible for obtaining all permits or authorizations required by any regulatory body for installation or use of the Product.

Notice of Claims

To make a claim under this One-Year Limited Warranty the original purchaser must provide written notice to nora systems, Inc. at 9 Northeastern Blvd., Salem, NH 03079, within thirty (30) days of discovery of any alleged defect of the Product. nora systems, Inc., must be given the opportunity to inspect and examine the Product.

Supersedes all previous information. Effective February 2020.

											Stairtreads		
	3.5 mm: arago, arago nTx	3.5 mm: castello, grano, pado, satura, grano nTx	3.5 mm ed: grano	2.7 mm: hammered	2.7 mm: kivo™	3.2 mm: 825 round	3.5 mm: xp, xp nTx	3.5 mm: xp trac, xp trac nTx	4 mm: 920	9 mm: 992, 992 grano	5 mm: arago, grano, satura	4.5 mm: round 5 mm: hammered	4.5 mm: 920
ASTM F1344 Rubber Floor Tile	Type IB Grade 2	Type IB Grade 2	Type IB Grade 2	Type IA Grade 1	Type IB Grade 2	Type IA Grade 1	Type IB Grade 1	Type IB Grade 1	Type IA Grade 1	992: Type IIA 992 grano: Type IIB Grade 2	–	–	–
ASTM F2169 Resilient Stair Treads	–	–	–	–	–	–	–	–	–	–	Type TS Class 2 Group 1 or 2 Grade 2	Type TS Class 2 Group 1 or 2 Grade 2	Type TS Class 2 Group 1 or 2 Grade 1
Limited Warranty/years	15	15	15	15	15	15	15	15	15	15	15	15	15
nTx Bond Warranty/years	10	10	–	–	–	–	10	10	–	–	–	–	–
Conductivity Warranty/years	–	–	10	–	–	–	–	–	–	–	–	–	–
Flammability (E648/NFPA 253): ≥ 0.45 watts/sq cm for Class 1 required	Class 1 0.94 nTx: 0.98	Class 1 0.94 nTx: 0.97	Class 1 0.58	Class 1 0.87	Class 1 1.1	Class 1 0.80	Class 1 0.71 nTx: 0.54	Class 1 0.68	Class 1 0.94	Class 1 0.56	Class 1 1.0	Class 1 1.1	Class 1 0.94
Smoke Density (ASTM E662): < 450 required	296/16 nTx: 369/205	296/16 nTx: 346/145	418/285	162/208	231/234	413/367	197/36 nTx: 422/201	372/284	272/167	289/373	296/16	380/230	272/167
Tunnel Test (ASTM E84): flame/smoke	**	**	**	**	**	**	**	**	Class A 15/300	**	**	**	Class A 15/300
CAN/ULC-S102.2: Surface Burning for FSR/SDC	Contact the nora Technical Department or refer to the nora Guide Specification for details.												
Slip Resistance (ASTM D2047): Neolite dry/Neolite wet ≥ 0.5 required	0.81/0.87	castello/pado/ satura (two-tone) 0.87/0.93 grano/satura (hammered) 0.99/0.95	1.0/0.90	0.90/1.0	0.87/0.93	0.76/0.85	0.90/1.0	.99/98	0.85/0.76	0.93/0.93	arago: 0.81/0.87 grano/satura: 0.99/0.95	round: 0.85/0.76 hammered: 0.99/0.95	0.85/0.76
Bacteria Resistance (ASTM E2180/ASTM G21)	Resistant to bacteria, fungi, and micro-organism activity												
Latex Allergies (ASTM D6499)	Inhibition , results are below detection level												
Sound Absorption (ASTM E2179): compare ΔIIC values only	ΔIIC 18	ΔIIC 18	ΔIIC 15	ΔIIC 16	ΔIIC 13	ΔIIC 16	ΔIIC 14	ΔIIC 14	ΔIIC 18	**	**	**	**
Sound Absorption (ISO 10140-3): compare ΔLw values only	ΔLw 10 dB	ΔLw 11 dB	ΔLw 15 dB	ΔLw 9 dB	ΔLw 11 dB	ΔLw12 dB	**	**	ΔLw 13 dB	ΔLw 17 dB	**	**	**
Hardness (ASTM D2240): Shore Type A	82	82	84	89	82	89	89	89	91	77	82	82	91
Static Load (ASTM F970): with 800 lbs/psi ≤ 0.005 in with 250 lbs required	0.004	0.005	0.004	0.005	0.005	0.004	0.002	0.005	0.005	0.004	0.005	0.005	0.005
Rolling Load Limit (ASTM F2753): lbs/psi (1)	850	850	850	550	850	550	850	850	850	850	–	–	–
Forklift Traffic	Yes	Yes	Yes	No	Yes	No	Yes	Yes	Yes	Yes	–	–	–

											Stairtreads		
	3.5 mm: arago, arago nTx	3.5 mm: castello, grano, pado, satura, grano nTx	3.5 mm ed: grano	2.7 mm: hammered	2.7 mm: kivo	3.2 mm: 825 round	3.5 mm: xp, xp nTx	3.5 mm: xp trac, xp trac nTx	4 mm: 920	9 mm: 992, 992 grano	5 mm: arago, grano, satura	4.5 mm: round 5 mm: hammered	4.5 mm: 920
Abrasion Resistance (ASTM D3389): H-18 Wheels 1.1 lb load and 1000 cycles ≤ 0.035 oz (1.0 g) required	0.008	0.002	0.004	0.006	0.002	0.005	0.005	0.005	0.007	0.005	arago: 0.006 grano/satura: 0.002	round: 0.005 hammered: 0.006	0.007
Oil & Grease Resistance (ISO 26987)	Yes	Yes	Yes	No	Yes	No	No	No	Yes	Yes	Yes	Yes	Yes
Heat Resistance (ASTM F1514): Avg. ΔE ≤ 8.0 required	Easily achieved with all batches and regular maintenance.												
Static Generation (AATCC 134): 20% RH	< 1000 volts	< 1000 volts	–	< 1000 volts	< 1000 volts	< 1000 volts	< 1000 volts	< 1000 volts	< 1000 volts	< 1000 volts	< 1000 volts	< 1000 volts	< 1000 volts
Static Generation (ANSI ESD S97.2)*	–	–	< 20 volts	–	–	–	–	–	–	–	–	–	–
Conductivity (ASTM F150): ohms	–	–	10 ⁶ < 10 ⁹	–	–	–	–	–	–	–	–	–	–
Thermal Transmission (ASTM C518): R-value	-0.90	-0.90	**	**	**	**	**	**	**	**	**	**	**
Embodied Carbon (Gradle to Gate)	17.2 kg CO ₂ e/m³	17.2 kg CO ₂ e/m³	21.0 kg CO ₂ e/m³	-	17.2 kg CO ₂ e/m³	-	-	-	-	-	17.2 kg CO ₂ e/m³	17.2 kg CO ₂ e/m³	-
Total Recycled Content (Pre Consumer)	-	-	-	-	-	-	-	-	-	11%	-	-	-
Indoor Air Quality	GREENGUARD Gold Certified for low VOC Emissions in compliance with CDPH 01350												
Disclosure of Environmental Impacts (EPD)	Yes	Yes	Yes	No	Yes	No	No	No	No	No	Yes	Yes	No
Disclosure of Product Ingredients (HPD)	Yes	Yes	Yes	No	Yes	No	No	No	No	No	Yes	Yes	No
Cradle to Cradle Certified® Silver	Yes	Yes	No	No	Yes	No	No	No	No	No	Yes	Yes	No
Greenhealth Approved	Yes	Yes	No	No	Yes	No	No	No	No	No	Yes	Yes	No
LEED v4	Refer to the nora Guide Specification for details.												

(1) Wheel Types: No metal or hard plastic wheels, the shape of the contact surface of wheels must be flat with round edges. The shore hardness must be Type A ≤ 90.
* Tested with conductive shoes
** Not tested
Note: Exact values may vary due to the test methods and tolerance between batches. The ASTM minimum requirement must be achieved or exceeded.


	2 mm: convia, dariva, environcare, sentica, environcare nTx, sentica™ nTx	3 mm: dariva, environcare, sentica, environcare nTx, sentica nTx	2 mm: unita	2 mm/3 mm: valua	4 mm acoustic: environcare, sentica	2 mm/3 mm ed: environcare, sentica
ASTM F1344 Rubber Floor Tile	Type I Grade 1 (excludes nTx)	Type I Grade 1 (excludes nTx)	–	Type I Grade 1	–	Type I Grade 1 (2 mm only)
ASTM F1859 Rubber Sheet Floor Without Backing	Type I	Type I	Type I	Type I	–	Type I
ASTM F1860 Rubber Sheet Floor With Backing	–	–	–	–	Type I Grade 2	–
Limited Warranty/years	15	15	15	15	15	15
nTx Bond Warranty/years	10	10	–	–	–	–
Conductivity Warranty/years	–	–	–	–	–	10
Flammability (E648/NFPA 253): ≥ 0.45 watts/sq cm for Class 1 required	Class 1 0.97 nTx: 0.83	Class 1 1.03 nTx: 0.82	Class 1 0.82	Class 1 2 mm: 0.98 3 mm: 1.08	Class 1 1.08	Class 1 1.0
Smoke Density (ASTM E662): < 450 required	70/41 nTx: 185/97	376/256 nTx: 282/155	216/315	2 mm: 134/109 3 mm: 360/203	299/153	2 mm: 81/122 3 mm: 352/342
CAN/ULC-S102.2: Surface Burning for FSR/SDC	Contact the nora Technical Department or refer to the nora Guide Specification for details.					
Slip Resistance (ASTM D2047): Neolite dry/Neolite wet ≥ 0.5 required	0.93/0.90	0.93/0.91	0.84/079	0.97/0.85	1.0/0.90	0.92/0.89
Bacteria Resistance (ASTM E2180/ASTM G21)	Resistant to bacteria, fungi, and micro-organism activity					
Latex Allergies (ASTM D6499)	Inhibition ELISA, results are below detection level					
Sound Absorption (ASTM E2179): compare ΔIIC values only	ΔIIC 12	ΔIIC 13	ΔIIC 12	2 mm: ΔLw 12 dB 3 mm: ΔLw 13 dB	ΔIIC 23	ΔIIC 10
Sound Absorption (ISO 10140-3): compare ΔLw values only	ΔLw 8 dB	ΔLw 10 dB	ΔLw 8 dB	2 mm: ΔLw 8 dB (2 mm) 3 mm: ΔLw 10 dB	ΔLw 20 dB	2 mm: ΔLw 6 dB 3 mm: ΔLw 10 dB
Hardness (ASTM D2240): Shore Type A	92	92	92	92	92	92
Static Load (ASTM F970): with 800 lbs/psi ≤ 0.005 in with 250 lbs required	0.003 nTx: 0.002	0.003	0.003	2 mm: 0.002 3 mm: 0.003	0.003	0.003
Rolling Load Limit: lbs/psi (1)	450	550	450	2 mm: 450 3 mm: 550	450	2 mm: 450 3 mm: 550
Forklift Traffic	No	No	No	No	No	No
Abrasion Resistance (ASTM D3389): H-18 Wheels 1.1 lb load and 1000 cycles ≤ 0.035 oz (1.0 g) required	0.008	0.003	0.008	0.006	0.007	2 mm: 0.002 3 mm: 0.003

Technical Data - noraplan®

	2 mm: convia, dariva, environcare, sentica, environcare nTx, sentica nTx	3 mm: dariva, environcare, sentica, environcare nTx, sentica nTx	2 mm: unita	2 mm/3 mm: valua	4 mm acoustic: environcare, sentica	2 mm/3 mm ed: environcare, sentica
Oil & Grease Resistance (ISO 26987)	No	No	No	No	No	Yes
Heat Resistance (ASTM F1514): Avg. ΔE ≤ 8.0 required	Easily achieved with all batches and regular maintenance.					
Static Generation (AATCC 134): 20% RH	< 1000 volts	< 1000 volts	< 1000 volts	< 1000 volts	< 1000 volts	–
Static Generation (ANSI ESD S97.2)*	–	–	–	–	–	< 20 volts
Conductivity (ASTM F150): ohms	–	–	–	–	–	10 ⁶ < 10 ⁹
Thermal Transmission (ASTM C518): R-value	0.04	0.04	0.04	0.04	0.20	2 mm: 0.01 3 mm: 0.04
Embodied Carbon (Gradle to Gate)	5.87 kg CO ₂ e/m³	-	5.87 kg CO ₂ e/m³	2 mm: 5.87 kg CO ₂ e/m³	8.5 kg CO ₂ e/m³	2 mm: 12.2 kg CO ₂ e/m³
Total Recycled Content (Pre Consumer)	-	-	-	-	29%	-
Indoor Air Quality	GREENGUARD Gold Certified; CDPH 01350 compliant					
Disclosure of Environmental Impacts (EPD)	Yes	Yes	Yes	Yes	Yes	Yes
Disclosure of Product Ingredients (HPD)	Yes	Yes	Yes	Yes	No	Yes
Cradle to Cradle Certified® Silver	Yes	Yes	Yes	Yes	No	No
Greenhealth Approved	Yes	Yes	Yes	Yes	No	No
LEED v4	Refer to the nora® Guide Specification for details					

(1) Wheel Types: No metal or hard plastic wheels, the shape of the contact surface of wheels must be flat with round edges. The shore hardness must be Type A ≤ 90.
* Tested with conductive shoes
** Not tested
Note: Exact values may vary due to the test methods and tolerance between batches. The ASTM minimum requirement must be achieved or exceeded.

Smart Navigators to the perfect floor

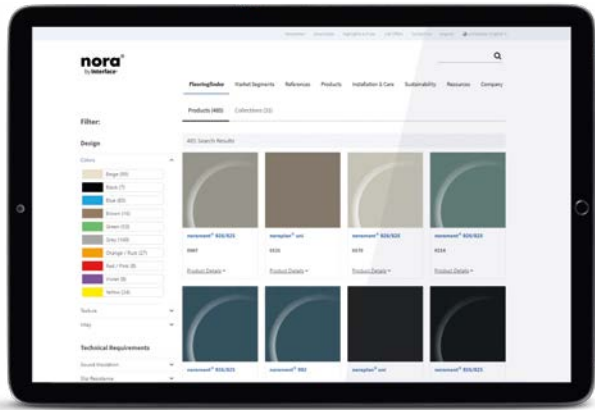

Flooring Finder


Select the floor that matches your demands

Specify the floor you need:

- Select color and design
- Sound Absorption properties
- Moisture Limits
- ESD properties
- Rolling Load Limits
- Fire Ratings
- Certifications
- and more

Select the floor that matches your project's requirements

www.nora.com/united-states/en/resources

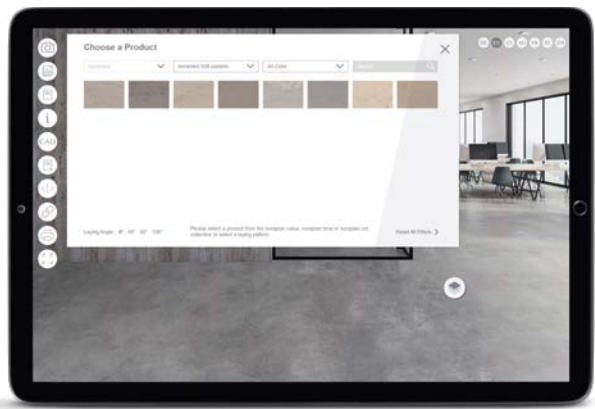

Room Designer

Experience it in your project's room

See how it looks in a real room:

- Use a sample room from the vast collection
- Or upload a room image from your project
- The software automatically recognizes the floor area
- Print, save or share your visual experience with others.

Experience how the selected floor will look in your project

www.nora.com/united-states/en/resources


Building Information Modeling (BIM)



Building Information Modeling (BIM) is a software-supported method used to optimize the planning, construction and management of buildings. All relevant material and building data is digitally captured, managed, combined and cross-linked. This information can be used throughout the entire life cycle of a building, starting with the documentation of planning, through cost and project management to building operation.

We offer BIM files of the floor covering and stair tread standard portfolio for download on our website.

Further information can be found at bim.nora.com.



Please note:

norament® and noraplan® have been developed for indoor installation. nora® floor coverings are not suitable for installation in outdoor applications.

The particulars given in this brochure are for informational purposes only concerning the products presented. They represent descriptions or designations, but not any warranted qualities. This information cannot cover all possible service conditions which our floor coverings may encounter.

If the floor covering is going to be exposed to out-of-the-ordinary service conditions and stresses (e.g. extreme UV radiation, chemical substances or other aggressive media), please contact us for advice.

We will be pleased to supply you on request with flooring samples to enable you to carry out in-house tests. We reserve the right to alter technical values as part of an ongoing product improvement process.

This brochure as well as the pictures and illustrations it contains are subject to a copyright owned by or licensed for nora systems GmbH/nora systems, Inc.

nora®, norament®, and noraplan® are trademarks owned by nora systems GmbH and registered in the United States, Canada, and other countries. Cradle to Cradle Certified® is a registered trademark of the Cradle to Cradle Products Innovation Institute. Other labels used here are trademarks of their respective owners.

